

Form No. CH-1009 October 2009 Replaces CH-2103



Shop Supplies & Accessories including



Shop Supplies & Accessorie	es1-47
Assortments	48-64
Metal Work!	65-95

Product Listed in alphabetical order within section.

HOW TO USE THIS CATALOG: Shop Equipment & Supplies

• High quality photographs for part identification

 Features number of parts in each package

 Indicates brand of retail packaging



Machine washable, red, hemmed towels. Ideal for auto shops, home, office, etc. Professional quality, absorbent and reusable. Towel size is 13" x 15"

Champ 9-273 (12) 12 Pack Champ 9-233 (25) 25 Pack Champ 9-243 Display Box

 Features part numbers for alternate package quantities and secondary brands

Product Name	Page :
Abrasives	68-73
Accessories, MIG	
Accessories, Oxy-Acetylene Tools	
Accessories, Sanding	7
Accessories, Solder	8
Accessories, Welding	
Accessories, Welding Helmet	
Acid Brushes	7
Acid Core Solder	81
Adapters, Grease Gun	
Air Blowguns	
Air Chucks & InflatorsAir Cleaners	1
Air Compressor	۱۰۰۰۰۰۰۰ ۱۴
Air Hose	
Air Hose - Nylon	
Air Hose Couplers & Nipples	
Air Inflators	
Air Operated Grease Gun	
Airco Style Tips	78
Alarm, Back-Up	2
Aluminum Grinding Wheels	
Aluminum Tape	
Ammeters	2
Antenna Assemblies	3-
Antenna Cable Extensions & Adapters	3 5
Antenna Masts	(
Antennas	3-
Antennas - CB	(
Antennas - Power	
Antifreeze Tester	40
Applicator, Mitt/Pad	10
ARO	
Back-Up Alarms	
Battery Filler	
Battery Hardware	i- /
Battery Hardware & Tools Battery Tester - Hydrometer	/ - (
Bead Sealant	
Bench Grinding Wheel Dresser	
Bench Grinding Wheels	
Bent Pull Pin	3:
Blades	
Blades, Hacksaw	
Blades, Razor	
Blaster Horns	
Blind Spot Mirrors	
Blowguns	
Body Filler Spreaders	
Body Trim & Molding Tape	
Bonnets	1
Boxed Tire Repair Kits	
Boxes, Battery	
Brass Wire Brushes	7
Brazing Flux	
Brazing Rods	
Brooms	
Brooms & Squeegees	
Brooms, Brushes, Mops & Squeegees	
Brushes	
Brushes - Paint	
Brushes - Power Wire - Crimped Cup	
Brushes - Power Wire - Crimped Whe	
Brushes - Power Wire - Knotted Cup	/ ;
Brushes - Power Wire - Knotted Whe	
Brushes - Power Wire - Stringer Bead Tv Brushes - Utility	
טונוטום - טוווונץ	/

Product Name	Page #	Product Name	Page #	Product Name	Page #
Brushes - Wire Cup w/Shank	75-76	Cutting	78-81	Gas Diffusers	
Brushes - Wire End w/Shank	75-76	Cutting & Welding Tips -		Gas Welding & Cutting Kit	81
Brushes, Car Wash	10-11	Cross Reference Chart	80	Gasket Material	21
Bucket, Wash	14	Cutting Tips	80	Gauge Kits	21
Bug Sponges	13	Cutting Wheels	68	Gauge Panels	21
Bulb, Battery Filler		Deer Whistles		Gauges21-25,	
Bulbs, Drop Lights		Diffusers, Gas	89	Gauges - Tachometers	
Bulbs, Replacement Driving Lights.		Disc Style Horns		Gauges - Vacuum & Elapsed Time Meter	
Bungee Cords		Disc, Sanding		Gauges - Voltage	
Cable Connectors		Discs, Polishing		Gauges, Acetylene	
Cable Extensions, Antenna		Do-It-Yourself Tire Repair Kits		Gauges, Inflator	
Cable Liners		Double Flaring Tool		Gauges, Oxygen	
Cable Lugs		Double Knotted Cup Brushes		Gauges, Tire	
Cable, Welding		Double-Face Foam Tape		Gloves	
Cage, Bulb		Drain Pans		Goggles, Safety	
Cans, Gas		Drain Pump		Graphite, Lubricant	
Cans, Oil		Dresser, Grinding Wheel		Grease	
Cans, Safety		Drill Set, Tip		Grease Gun Accessories	
Cap, Pick-Up Tape		Drip Pans		Grease Guns	
		Driver's Gloves		Grinding Shields	
Cap, Welding					
Caps, Dust		Driving Lights & Accessories		Grinding Wheels Aluminum	
Caps, Valve		Drop Lights		Grinding Wheels - Aluminum	
Car Wash		Duct Tape		Grinding Wheels - Flexible/Hubless	
Car Wash - Applicator Pads		Dust Caps		Grinding Wheels - Type 1	
Car Wash - Chamois		Dusting Cloths Wax-Treated		Grinding Wheels - Type 27 - Hub/Hubles	
Car Wash - Cloths		Ear Muffs		Grinding Wheels - Type 28	
Car Wash - Hose Nozzles & Mender		Ear Plugs		Grinding, Mounted Points	
Car Wash - Sponges & Wash Mitts.		Elapsed Time Gauge		Guards, Splash	
Car Wash Applicator Pads		Electrical Tape		Guns, Grease	
Car Wash Brushes		Electrode Holder		Hacksaw Blades - 12"	
Car Wash Polishing Bonnets & Disc	s 13	Electrodes, Welding	93-95	Hammer Handle	44
Carrier Strap, Battery	7	Element, Air Cleaner	14	Hammer, Chipping	
CB Antennas		Emergency Tire Repair Kits	41	Hand Soap	64
C-Clamp - 4"		Emergency, Trouble Light	24-25	Handle, Drop Light	.16-17
C-Clamps	91	Exhaust Cutting Wheels	68	Handle, Hammer	44
Cement, Tire	40	Exhaust Tip	14-15	Handle, Mop	9
Chamois	11	Expansion Anchor, Pickup Truck	38	Handles, Brush	9
Champ Merchandising Solutions	48-64	Extension, Exhaust		Harris Style Tips	79
Charger, Battery		Exterior Accessories		Hearing Protection	
Chipping Hammer		Face Shield		Heater Hose Tape	
Chrome Accessories		Fans		Heating Tips - Rosebud	
Chucks, Air		Fender Cover		Helmet Headgear	
Circuit Tester		File, Flat Mill		Helmet, Welding Lenses	
Circular End Wire Brushes		Filler Bulb, Battery		Helmets, Welding Accessories	
Clamp, C		Filler Cap, Oil		Hitch Pin	
Clamps, Ground		Filler, Battery		Holder, Certificate	
Clamps, Locking Weld		Filler, Body Spreader		Holder License Plate	
Cleaner, Rub-R-Flux		Fillers, Radiator		Hood Latch	
Clothes Hanger Bar		Filter, Paint		Hooks, Rope	
Cloths Car Wash				Hooks, Tow	
		Flap Wheels		Horns	
Compressor, Air		Flaps, Mud			
Connectors, Cable		Flexible Grinding Wheels		Horns & Back-Up Alarms	
Contact Tips		Floor Brushes		Hose Menders	
Coolant Recovery		Floor Mats		Hose Nozzles	
Cords, Shock		Floor Protector Mats		Hose Repair, Oxy-Acetylene	
Core Removal Tools		Floor Squeegees		Hose Tape, Heater	
Cores, Valves		Flow-Through Brushes		Hose, Air	
Couplers		Fluorescent Bulbs		Hose, Grease Guns	
Cover, Fender		Fluorescent Lights	16-17	Hoses, Oxy-Acetylene	
Cover, Spare Tire		Flush Kits	34	Hub Grinding Wheels	
Covers, Seat		Flux, Brazing	88	Hubless Grinding Wheels	
Covers, Steering Wheel	37	Flux, Liquid Solder	87	Hydrometer, Battery Tester	8
Creeper Wheels		"For Sale" Sign	28	Ice Scrapers	47
Crimping Tool		Frame, Hacksaw		Inductive Timing Light	
Cup Style Power Brushes		Frame, License Plate		Industrial Milton	
Cushions, Seat		Fuel Level Gauges		Inflator Gauges	1
Cut-Off Wheel Mandrel Set		Funnels		Inflators, Air Line	
Cut-Off Wheels		Gas Cans		Inner Tubes, Tire	
				, -	

Product Name	Page #	Product Name	Page #	Product Name	Page #
Interior & Exterior Accessories	28-29	Nozzles, Oxy-Acetylene Tips	78-80	Rearview Mirrors	32
Jack		Nylon Air Hose		Receptacle, Wall	
Jersey Gloves		Nylon Paint Brushes		Reel, Drop Lights	
Key Holder, Magnetic		Nylon Rope		Reel, Extension Cord	
Kits, Torch		OE Replacement Antennas		Reflective Red Tape	
Knob, Shifter		OE Replacement Horns		Reflector Light - Clamp On	
Knob, Utility		Off-Road Steeling Wheel Knob		Regulators	
Knotted Cup Wire Brushes		Oil Drain Pump			
		•		Relay, Light	
Knotted Wheel Wire Brushes		Oil Luba & Fluid		Repair Kits	
Latch, Hood		Oil, Lube & Fluid		Repair Material, Gasket	
Lead Ends		Oilers		Repair, Hose Oxy-Acetylene	
Lead-Free Solder		Oxy-Acetylene Hose Repair		Replaceable Handle, Drop Light	
Leather Gloves		Oxy-Acetylene Hoses		Replacement Filters	
Lens Repair Tape	37	Oxy-Acetylene Lighter	80	Replacement Grinding Shields	83
Lenses, Welding Helmet		Oxy-Acetylene Tips & Nozzles	78-80	Reservoir, Radiator	34
License Plate Brackets	29	Oxy-Acetylene Tools & Accessories .	80-81	Respirator	35
License Plate Brackets & Frames	29	Padlocks	35	Retracting Scraper	45
License Plate Frames	29	Pads, Applicator	10	Rods, Brazing	88
Lift Drain	16	Pads, Sanding	72	Rods, Electrode	
Light & Accessory Relay		Pail		Rods, Welding	
Lighter, Oxy-Acetylene		Paint Brushes		Roller Stitcher	
Lighters		Panels, Gauges		Rope	
Lights, Driving		Pans, Drain & Drip		Rope Hooks	
		Paper Floor Mats		Rope, Tow	
Lights, Drop Lights		•		•	
Linch Pin		Parts Bag		Rosin Core Solder	
Lincoln		Parts Cleaning Brush		Rotary Files & Rasps	
Liquid Flux, Solder		Patches		Rotary Pump	
Lock, Steering Wheel		Patch-N-Plugs		Rubber & Mounting Lubricant	
Locks		Pegboard Hooks		Rubber Rope	
Lubricants		Pickup Truck Cap Tape		Rubber Tie-Downs	
Lug Wrench	45	Pickup Truck Expansion Anchors	38	Safety Glasses	82
Lugs, Cable	93	Pins, Bent Pull	33	Safety Goggles, Shields & Accesso	
Magicure Jiffy Gun Plug Kit	41	Pins, Hitch	33	Safety Information	66-67
Magicure Pli-Seal Strips	42	Pins, Linch	33	Safety Products	82-85
Magnet		Plug, Jiffy Gun Kit		Sanding - Emery Cloth	71
Mandrel Set		Plugs		Sanding - Flap Wheels	
Marquette Style Tips		Points, Mounted Grinding		Sanding Accessories	
Masts, Antenna		Polishing Bonnets & Discs		Sanding Discs	
Mats, Floor		Polishing Cloth		Sanding Pads	
Mats, Protective Floor		Power Antennas		Saw, Hacksaw Frame	
Measures		Power Brushes, Knotted Wheel		Scrapers	
				Scribe	
Measuring Tape		Power Wheel Brushes			
Mechanics Wire		Power Wire Brushes, Crimped Cup		Scrubbers, Squeegees	
Merchandising Supplies		Power Wire Brushes, Crimped Whee		Sealant, Tire	
Metal Work! Abrasives		Power Wire Brushes, Knotted Cup		Seat Belts	
Metal Work! Brushes		Power Wire Brushes, Stringer Bead T		Seat Covers	
Metal Work! Cutting		Power Wire Brushes, Wire Cup w/Shan		Seat Covers, Plastic	
Metal Work! Safety Products		Power Wire Brushes, Wire End w/Shanl	k75-76	Seat Cushions	
Metal Work! Soldering Products	86-87	Pressure Gauges, Tire	39	Self-Priming Pump	34
Metal Work! Welding Products	88-95	Probe, Tire	43	Sending Units, Gauges	22-25
MIG Accessories	89	Protection, Hearing	82	Shank Brushes	75-76
MIG Welding Part Interchange	90	Protective Plastic Seat Covers		Shield, License Plate	
MIG Wire		Protective Spectacles		Shields & Accessories	
Mirror		Pumice Hand Soap		Shifter Knob	
Mitts, Wash		Pumice Soap		Shock Cords	
Mop		Pump, Tire		Shop Brushes	
Mop Handle		Pumps		Shop Equipment & Supplies	
•		•			
Mop Head		Pumps & Siphons		Shop Lighting	
Mop, Car Wash		Purox Style Tips		Shop Lights	
Mounted Flap Wheels		PVC Sponge Foam		Shop Tool & Maintenance	
Mounted Grinding Points		Radial Emergency Tire Kit		Shop Tools	
Mounted Panels, Gauge		Radial Patches		Shop Towels	
Mud Flaps		Radiator Coolant Recovery		Shop Towels, 4 Pack	
Multi-Purpose Grease		Radiator Fillers		Sign, "For Sale"	
Nail Brush		Radiator Tape	38	Silver Solder	
Needle Nose Adapter, Grease		Rasps		Single Knotted Cup Brushes	75
Nipples	2-3	Ratchet Strap	46	Siphons	34
Nozzles	12	Razor Blades	45	Smith Style Tips	79


Product Name	Page #
	•
Snap-In Tire Valves	
Snow Brushes	
Soap, Pumice	
Soapstone Holder and Refills	
Solder	00
Soldering Iron	
Soldering Products	
Soldering Tools	
Speedometer Cable Lubricant	
Splash Guards	
Sponges	
Spreaders, Body Filler	
Spring Base Antennas	
Squeegees	9
Stainless Steel Brushes	
Stainless Steel Wire Brush	
Steel Power Wire Brushes - Crimped W	heel 74
Steel Wire Brushes	
Steel Wool - Grade 00 (fine)	
Steering Wheel Covers	
Steering Wheel Knob - OFF ROAD	
Steering Wheel Lock	
Stop & Tail Light Tape	
Strap, Tow	46-47
Strap-On Certificate Holder	
String Repair	
String, Radial Repairs	
Stringer Bead Twist Wire Brushes	
Strips, Tire Repair	42
Suction Gun	
Tachometer Gauge	
Tank Repair Kits	
Tape	
Tape - Aluminum	
Tape - Body & Trim Molding	
Tape - Double-Face Foam	
Tape - Duct	
Tape - Electrical	37
Tape - Heater Hose	
Tape - Hook-N-Loop Fasteners	
Tape - Lens Repair	
Tape - Pick-Up Truck Cap	
Tape - Radiator	38
Tape - Reflective Red	
Tape - Teflon®	
Tape Measure	
Tape, Weatherstripping	
Teflon® Tape Temperature Gauge	
Terminal Cleaner, Battery	
Terminal Protector, Battery	
Terry Towels	
Tester, Battery	
Testers	
T-Handle Repair Tools	
Thread Repair	
Tie Down	
Tie-Downs	38
Timing Light	
Tinning Brush	
Tip Cleaner	
Tip Drill Set	
Tin Evhauet	1/1_15

Product Name	Page #
Tips, Contact	89
Tips, Oxy-Acetylene Nozzle	78-80
Tire Brush	11
Tire Cement	
Tire Gauges	39
Tire Inner Tubes	39
Tire Lubricant	40
Tire Pump	43
Tire Repair - Wheel Weights	
Tire Repair Chemicals	40
Tire Repair Kits	
Tire Repair Tools	
Tire Sealant	
Tire Swab	
Tire Tools	
Tire Valves	
Tire Valves - Tubeless	
Tools	
Tools, Battery	
Tools, Oxy-Acetylene	
Tools, Shop	
Tools, Soldering	
Torch Kits	
Tow Hooks	
Tow Rope	
Tow Strap	
Transmission Funnal	
Transmission Funnel	19-20
Transmission, Drain Funnels	
Tray, Battery Tread Depth Gauge	
Trouble Light, 12-Volt	
Truck Expansion Anchors	10-17
Truck Tape	37
Tru-Flate	
Tube & Rubber Patch Kits	
Tube Brush	
Tubeless Patches	
Tubeless Tire Valves	
Tubes, Inner - Tire	
Tubing, Double Flaring Tool Kit	
Tune-Up Tools	
Type 1 Grinding Wheels	
Type 27 Grinding Wheels	
Type 28 Grinding Wheels	
Universal Antennas	
Unlock Door Tools	46
Upholstery Brush	11
Utility Brushes	77
Utility Knife	45
Utility Knife Blades	45
Vacuum Gauges	
Valve Extensions	
Victor Style Tips	
Vinyl Top & Upholstery Brush	
Voltage Gauges	
Wall Receptacle	
Warning Whistles, Deer	
Wash Bucket Kit	
Wash Mitts	
Wash Mop	
Wax Pad	
Weather Stripping	
Weights, Wheel	
Welding & Cutting Kit, Gas	
Welding Accessories	91-92

Product Name	Page #
Welding Cable	92
Welding Cable Lugs	
Welding Cap	
Welding Gloves	
Welding Helmet Lenses	
Welding Helmets & Accessories	
Welding Products	
Welding Rods & Electrodes	
Wheel Covers, Steering	
Wheel Dresser	
Wheel Lock, Steering	
Wheel Weights	
Wheel/Fender Brush	
Wheels, Aluminum Grinding	
Wheels, Creepers	
Wheels, Cut Off	
Wheels, Cutting	
Wheels, Flap	
Wheels, Flexible Grinding	
Wheels, Type 1 Grinding	
Wheels, Type 27 Grinding	
Wheels, Type 28 Grinding	
Whisk Broom	
Whistles, Deer	
Windshield Repair	
Wiping Cloths	
Wire Brush Adapters Wire Brushes	
Wire Cup Brushes w/Shank	
Wire End Brushes w/Shank	
Wire Ends	
Wire, Mechanics	
Wire, MIG	
Wool Steel	

Air Blowguns

- All blowguns are 1/4" NPT female threads
- · Tool of a hundred uses
- · Cleans away dirt, filings, great for shops and garages



ARO design. Adjust from a wisp to a full-volume flow. Complete with a handy pocket clip. 150 psi maximum. Attach to 1/4" ARO air line coupler.




Thumb lever operation with rubber tip.
Safety vents meet OSHA requirements.
For carburetor work, cleaning air lines, etc.
Built-in reducer limits nozzle pressure to 30
psi or less with inlet pressures up to 150 psi.

Air Chucks & Inflators


- Direct air line chucks have a built-in shut-off valve and, therefore, cannot be used on inflator gauges
- Use when air supply lines come directly from the compressor with no other valve in the line
- 1/4" female NPT threads




Air compressor/emergency light/pressure gauge. Plugs into 12V receptacle, delivers up to 200 psi. 12' power cord with lighter plug. 28" air hose has lock-on chuck that inflates tires, balls and rafts & pressurizes RV water systems. Operates spray guns and foggers. Adapter nozzles included.




Simplifies filling dual truck tires.








Easy inflation, extended for hard-reach valves.



12" hose. Calibrated 10-120 lbs.







For primary & secondary pressures up to 160 psi. Gauge is calibrated in psi & kg/cm². 1/4" female NPT inlet/outlet.

Sales Tip

Valve stem caps help keep dirt and moisture out of tire valves. Valve extensions make tire valves easier to reach. See page 44

Air Hose - Nylon


- Self-retracting abrasion-resistant nylon lines recoil to 1/25 of extended length
- Rated for working pressure of up to 200 psi., resists oils and solvents.
- All lines have 1/4" NPT male full swivel fittings at both ends.
- · Eliminates twisting and provides free tool action. Coil guards to prevent crimping.


I.D.	Length	Champ Part # (Qty.)
1/4"	17'	9-955 (1)
1/4"	25'	9-956 (1)
3/8"	25'	9-1802 (1)




Air Hose Couplers & Nipples

- · Heavy-duty brass and tubular valve construction for long life and greater air flow
- "Push to connect" style for quick and easy coupling
- Body styles are all unique and are not interchangeable with other designs
- To match the coupler with the nipple, the body size must be the same










Air Hose Couplers & Nipples (continued)







0.444








Body size defines the air handling capacity of the coupler. The most popular for automotive shop use is 1/4" which handles air volumes up to 35 SCFM (Standard Cubic Feet per Minute). Under normal air line pressure, this coupler will readily connect and disconnect. 3/8" Body Couplers handle up to 60 SCFM while volumes above that should use 1/2". Note that 3/8" & 1/2" size couplers should not be connected or disconnected under pressure. Doing so, forces the coupling apart with a dangerous amount of force.

Antenna Assemblies




Fully adjustable ball base. Permits top, side or angle mounting. Three-section telescoping mast extends to 50". Closes to 20-1/4". Includes 48" cable with standard size plug.




In-fender mounted 5-section antenna extends to 39". Retracts to base, requires a special key to extend. Includes 48" cable with standard size plug. Also included: 2 keys, soft tip & hardware. Requires 9-1/2" space under fender.




29-3/4" stainless steel mast, overall 31". Includes 72" cable with standard size plug. OE style for Chevrolet, Ford, Mercury, Pontiac. Also fits: Lincoln & Nissan/Datsun models.




Tough, mar-resistant, resin-based polyester finish. 31-1/2" long overall with one-piece mast. Includes 65" cable with standard size plug. Includes optional mounting base. OE style for Chrysler, Dodge, Hyundai, Mazda, Mitsubishi. Also fits: Alfo Romeo, AMC, Audi, BMW, Buick, Cadillac, Chevrolet, Fiat, GMC Truck, Honda, Isuzu, Peugeot, Toyota & Triumph.




30-3/8" one-piece, stainless steel mast. Adjustable angle base. Includes 65" cable with standard size plug. OE style for Buick, Chevrolet & Chrysler models. Also fits: Cadillac, Dodge, GMC, Oldsmobile, Plymouth, Pontiac & Volkswagen models.




31-3/4" one-piece, stainless steel mast. Includes 72" cable with standard size plug. OE style for Buick, Cadillac, Chevrolet & Chrysler. Also fits: Audi, BMW, Mitsubishi, Hyundai, Mazda, Nissan, Subaru, Toyota & VW models.




Fully flexible 16-1/2" mast can be bent or twisted. Excellent for offroad vehicles & boats. Black TPR rubber coating resists weather & fading. Ball swivel bas mounts on fender, roof or side. Includes 54" cable with standard size plug.



Installs on side of cowl or body of pickups & vans. Bright finish three-section telescoping mast. Extends to 49", closes to 25-1/2". Includes 96" cable with standard size plug.




Three-section 45" mast. Booster coil extends reception range. Includes 54" cable with standard size connector.




Clamps onto bracket of West Coast style mirror. Use for trucks, vans, RVs or campers. Spring absorbs impact to protect mirror & antenna. 20" one-piece stainless steel mast. Includes 80" cable with standard size connector.


Antenna Assemblies (continued)



Center spring mast is pre-tuned for 88-108 MHz FM. Excellent AM reception. Stainless steel top mast/chrome plated lower mast. Overall length 25-1/4" - spring & adjustable base. Includes 48" cable with standard size plug.




Three-section mast extends to 53". Deluxe ball base adjusts to any angle. Includes 54" cable with standard size connector.




Three section mast, extends to 55". Includes 48" cable with standard size plug.

Dorman® 720-029 (1)



Three-section telescoping mast. Extends to 38", closes to 20". Adjustable angle base. Installs on fender cowl of most cars. **Dorman® 720-030 (1)**



Antenna Cable Extensions & Adapters

- Polyethylene-covered shielded copper cables
- · Lengths satisfy most vehicle installation requirements

Champ Part # (Qty.)	Length	Plug Size	Jack Size
9-468 (1)	24"	Standard	Standard
9-471 (1)	48"	Standard	Standard
9-474 (1)	108"	Standard	Standard




Antenna Masts


9-454 (1) Champ®

Slip-On Telescoping Mast


Bright finish 3-section mast with die-cast base. Extends to 49", closes to 22-3/4". Fits over 1" stub of original antenna and secures with set screw.



Strong spring base flexes under impact. Helps prevent damage to mast or original base. Three-section mast extends to 53", closes to 23-7/8". Fits over 1" stub of original antenna and secures with set screw.



Rubber 15" mast. Mounting studs for Ford, GM, AMC & Chrysler included.




One section 30-1/2" long mast. Threads onto original base with adapter studs (included).



One section 30-1/2" long mast. Threads onto original base with adapter studs (included).

Antennas - CB

- Champ's Citizen's Band mobile antennas are center loaded with stainless steel masts and heavy-duty spring
- Stainless steel tuning tips are adjustable for best SWR (standing wave ratio)
- · Coaxial cables are fully-assembled with standard type connector



Steel bracket clamps onto bracket of mirror. Use on right/left side of West Coast style mirror. Mast is removable for security. 49" long overall. Includes 16' coaxial cable.




Powerful ceramic magnet in base holds antenna. Plastic base liner helps prevent marring finish. Center-loaded mast has impact-absorbing base, 25" long overall. Not recommended for vinyl tops. Fully assembled with 15-1/2' coaxial cable.

Antennas - Power

- Each requires 11-1/2" deep x 3" long x 2" wide space under mounting surface for installation
- Four-section chrome plated stainless steel telescoping masts that extend to 31"
- · Retract flush into fender mount
- 12-volt DC power, positive or negative ground
- Also included is 55" cable with standard size plug, hardware and instructions




Use switch to raise and lower antenna mast. Universal type base permits mounting options. Mount on front or rear fender. Color-coded wiring kit with control switch & brace.



Raises when radio is on, lowers flush when off. Kit includes 5 mounting heads. Mounting heads: 3, 8, 15, 23 & 30°.

Tech Tip

antenna masts with light oil to prolong life.



Battery Hardware & Tools

- Hard-to-find parts to service batteries
- · Excellent stocking item for specialty and general repair dealers



16-5/8" x 9" x 10". Holds batteries up to 13-3/4"L x 7-1/8"W x 7-1/2"H. Polyethylene box keeps battery dry, protects from water/ corrosives damage and helps prevent short circuits. Includes polyethylene tie-down strap and nylon buckle.




13" x 9" x 10". Holds batteries up to 10-1/2"L x 7-1/8"W x 7-1/2"H. Polyethylene box keeps battery dry, protects from water/ corrosives damage and helps prevent short circuits. Includes polyethylene tie-down strap and nylon buckle.



For top terminal batteries. Acid resistant plastic strap. Double-grip jaws and safety catch.



2 quart polyethylene to be used with acid or water. Automatic pouring action — flow stops when battery is full.



6 oz. capacity. Soft vinyl squeeze bulb with 6" long spout w/flex. Acid resistant.



Corrosion-resistant steel wire brushes. Inner bristles clean posts. Outer bristles clean cable terminals.

Battery Hardware & Tools (continued)



Felt rings coated with corrosive preventive. Eliminates acid fumes from escaping at the seal. For side post batteries. One pair.




Felt rings coated with corrosive preventive. Eliminates acid fumes from escaping at the seal. For top post batteries. One pair. **Champ 9-1465 (50)**




13-1/2" long overall. Hydrometer float has large, easy to read markings. Checks battery condition by measuring specific gravity of battery acid.



Quick, easy way to check battery charge. Number of floating balls indicates cell condition.



Shows state of battery charge instantly. Dial indicates gravity of electrolyte: hot or cold. Tests all 6, 12 & 24 volt wet cell storage batteries.



1 amp trickle charger. Input 110/120 VAC, 50/60 Hz; Output 12VDC, 1 amp maximum. Includes color coded hookup wires with spring clips & instructions.




Use on 6 & 12 volt batteries. Up to 1,000 CA. Results in 30 seconds. Shock resistant movement with color coded clamps. Full 100 amp loaded capacity. Tests: Battery state-of-charge, battery cranking ability, charging system output and starter set.



13-3/4" x 7-1/2". Bolt-on replacement tray match mounting holes or brackets of most vehicles. One-piece, plastic coated steel with vented pocket to prevent accumulation of battery fluids. Holds group 4, 27, 29, 31, 53, 60 & 77 batteries.




11-3/8" x 7-1/2". Bolt-on replacement tray match mounting holes or brackets of most vehicles. One-piece, plastic coated steel with vented pocket to prevent accumulation of battery fluids. Holds group 1, 2, 17, 22, 23, 24, 42, 54, 55, 56, 72 & 74 batteries.

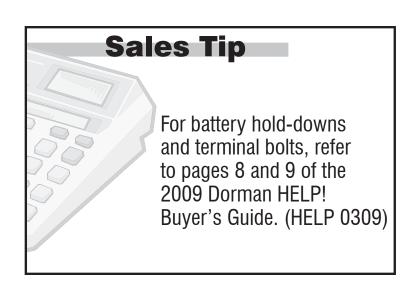


Brooms, Brushes, Mops & Squeegees



Wire bound with four rows of heavy cord stitching. Smooth-sanded hardwood handle.



24" wide brush with dense bristles for general use. Use with Champ hardwood broom handles: **95-1205**, **95-1207** or **95-1216**




24" wide brush suited for rough floor sweeping. Use with Champ hardwood broom handles: **95-1205**, **95-1207** or **95-1216**




24" natural fiber bristle, highly durable. For sweeping heavy debris. Use with Champ hardwood broom handles: 95-1205, 95-1207 or 95-1216




24" wide bristles are unaffected by water. Easy to decontaminate. Use with Champ hardwood broom handles: 95-1205, 95-1207 or 95-1216




For standard-duty brooms and brushes. 7/8" diameter.



For heavy-duty brooms and brushes. 1-1/8" diameter.



Reinforced, heavy duty broom handle. 15/16" diameter.




For squeegees and deck brushes. 1-1/8" diameter.



Smooth sanded hardwood with plated steel bracket.



Use with handles 95-1204.



Industrial type with 1/4" blade bolted to heavy-gauge steel angle frame with cast aluminum ferrule. Neoprene blade. Use with 95-1205 (handle not included).

Brushes

• High quality with flagged (split) and tapered bristles to hold more paint. Use with all paints.

B

C

Bristles	Width	Trim	Champ Part # (Qty.)
Economy, 100% pure bristle	1"	1-11/16"	9-223 (1)
Economy, 100% pure bristle	1-1/2"	1-11/16"	9-225 (1)
Economy, 100% pure bristle	2"	1-11/16"	9-227 (1)
Economy, 100% pure bristle	3"	1-11/16"	9-231 (1)
Nylon	2"	2"	9-226 (1)
Nylon	3"	2-1/2"	9-230 (1)



Car Wash - Applicator Pads

- · Ideal for applying waxes and polishes
- Sponge cored pads conform to body contours for uniform application



Poly sponge core encased in terry knit. Soft, lint free and machine washable.




6-1/2" x 4-1/8" x 1-1/3" terry knit applicator pad. Terry is sewn over a resilient, absorbent sponge.

Car Wash - Brushes




11" overall broom with wire bound handle. Bright plated cap with hanger ring.




With brass hose coupling. Use with 9-257, 9-245 & 9-263 brushes.



Tampico bristles with 2-1/2" trim. Wraparound vinyl bumper strip. Use with handle **95-1206**.



Tampico mix bristles with 2-1/2" trim. Wrap-around vinyl bumper strip. Use with handle **95-1206.**



Plastic bristles with 2-1/4" trim. Acrylic plastic bristles ensure long life. Wraparound vinyl bumper strip. New thin style flow-through head. Use with handle **95-1206**.



Molded polypropylene 20" brush will not crack. Flagged acriliflo bristles with 2" trim.

Car Wash - Brushes (continued)



Overall size is 2-3/8" x 8-1/4". 3/4" trim.



Overall size is 2-1/2" x 8-1/4". 5/8" trim.



All plastic scrub brush with 1" trim. Full length easy grip handle: 6"L x 2-1/8"W.



White Tampico. Heavy-duty foam plastic block – 2" trim bristles.



White Tampico. Heavy-duty foam plastic block – 2" trim bristles.



Brown Palmyra. Heavy-duty foam plastic block – 2" trim bristles.

Car Wash - Chamois

- Imported leather chamois are 100% cod oil tanned
- Highly absorbent and lint free
- · Safest and gentlest way to dry and polish vehicle.

Size	Champ Part # (Qty.)
2.5 square ft.	9-103 (1)
3.5 square ft.	9-109 (1)
4.5 square ft.	9-121 (1)
5.0 square ft.	9-102 (1)



Car Wash - Cloths



General purpose wiping, waxing and polishing. 30 sq. ft. roll in poly bag.



Use like a chamois, absorbs water & dries fast. Unharmed by detergents, gasoline & oil. Machine washable & won't mildew.



Use like a chamois, absorbs water & dries fast. Unharmed by detergents, gasoline & oil. Machine washable & won't mildew.


Car Wash - Cloths (continued)



405 square inch size. Extra long nap to trap and hold dust and dirt.



Use with rubbing compounds and polishes. Highly absorbent for polishing, cleaning & dusting. Bleached white cloths in 5 pound bag.



Hemmed and machine washable. Towel is 15" x 18". Package of 4.



Knit rags contained in handy 1 pound bag. For washing, wiping, waxing and polishing.



Mixed absorbent cloths in 10 pound carton. Lightweight rags for service stations, home, etc.

Car Wash - Hose Nozzles & Menders



Fits 5/8" to 3/4" ID hoses. Leakproof clamp-on installation with screwdriver. Non-corroding, break resistant, nylon fitting for easy repair of rubber or plastic water hoses.



Fits 5/8" to 3/4" ID hoses. Leakproof clamp-on installation with screwdriver. Non-corroding, break resistant, nylon fitting for easy repair of rubber or plastic water hoses.



Fits 5/8" to 3/4" ID hoses. Leakproof clampon installation with screwdriver. Non-corroding, break resistant, nylon fitting for easy repair of rubber or plastic water hoses.




Chrome plated, die-cast zinc body. Locking pistol grip. Solid brass valve with adjusting nut.




Heavy duty with locking trigger action. Nozzle reverses for high-pressure stream/ spray. Die-cast zinc body with brass valve.

Car Wash - Polishing Bonnets & Discs

- Durable heavy-duty construction with wool pile, natural sheepskin backing and mildew proof stitching
- · Bonnets secure to disc with heavy tie cord




Pile size is 3/4". Durable heavy-duty construction with wool pile, natural sheep-skin backing. Mildew-proof. Bonnets secure to disc with heavy tie-cord.




Pile size is 1-1/2". Durable heavy-duty construction with wool pile, natural sheep-skin backing. Mildew-proof. Bonnets secure to disc with heavy tie-cord.



Pile size is 1-1/4". Durable heavy-duty construction with wool pile, natural sheepskin backing. Mildew-proof. Bonnets secure to disc with heavy tie-cord.




Arbor size 1/4" dia. Natural wool yarn/synthetic backing. Use with 1/4" and larger electric drills.



Arbor size 7/8" dia. Virgin wool yarn/heavy canvas backing.


Car Wash - Sponges & Wash Mitts



Double-sided mitts with elastic cuff. Mildewproof. Heavy, fluffy, easy on all finishes. Washes quick and clean.




Double-sided mitts with elastic cuff. Mildewproof. Soft, fluffy fiber - best quality for fast cleaning action and long life, safe for use on all surfaces.




4-1/4" x 3-1/2" x 1-1/8". Easy to hold and use - tough nylon knit over cellulose sponge. Removes bugs, tree sap, road oil without marring glass or chrome.



7-1/2" x 5-1/4" x 3". Absorbs more water than natural sponge, is softer and more pliable than cellulose. Stays soft when dry. Can be boiled to sterilize.




7-1/2" x 3-3/4" x 2". Sponge is long-lasting and tough for all your car, truck, SUV, van, boat, home and shop cleaning needs.



7-5/8" x 5-5/8" x 2". Sponge is long-lasting and tough for all your car, truck, SUV, van, boat, home and shop cleaning needs.

Car Wash - Sponges & Wash Mitts (continued)




grip poly sponge.

Sales Tip

To simplify cleaning SUVs, vans, trucks, & RVs use Champ flow-through wash mops and brushes. See page 10.

Car Wash Accessories



22 oz. molded plastic. Replaceable and adjustable spray nozzle.



All your cleaning needs in a sturdy bucket: wash mitt, bug scrubber, bone sponge, polish cloth.

Chrome Accessories

 NOTICE: Not legal for sale or use on pollution-controlled motor vehicles. Not applicable or intended for street use on regulated motor vehicles unless originally equipped by the motor vehicle manufacturer.




Fits 4-7/32" (11cm) and 5-1/8" (13cm) carburetor necks. Uses AC A132, Fram CA189PL, Purolator AFP59 & Wix 42083 replacement elements. Includes element, emission control adapters, mounting stud & wing nut.



Fits 3-1/6" (7.8cm) and 2-5/8" (6.7cm) carburetor necks. Use Champ 7-994 replacement paper filter. Includes element, mounting stud & wing nut.



Fits 4-7/32" (11cm) and 5-1/8" (13cm) carburetor necks. Fits 2 and 4 barrel carburetors. Uses Fram CA101P. Purolator AFP21, & AC A130C replacement elements. Includes element, neck adapter ring, mounting stud & wing nut.



Replacement filter element for Champ **7-992**. 4" OD x 2" high.



Chrome plated seamless steel caps. Universal fit for most vehicles and trailers. Packaged in 2.



2-1/2" ID. 9" in length. Fits 2" to 2-1/2" pipe.

Chrome Accessories (continued)




2" ID. 9" in length. Fits 1-3/4" to 2" pipe.



2-1/2" ID. 9" in length. Fits 2" to 2-1/2" pipe.




1-5/8" ID. 9" in length. Fits 1-3/8" to 1-5/8" pipe.



2" ID. 9" in length. Fits 1-3/4" to 2" pipe.

Drain Pans

• CAUTION: Proper disposal of all oil products is mandated by state laws. These products help you to do your part to combat pollution and protect the environment by adhering to all regulations pertaining to oil product disposal.



ABS plastic pan collects fluids from wide area. 22" x 24" x 5" deep with integral strainer. Fits on lift drains with 7" diameter funnels.




Rolled top edge and corrugated bottom add strength. 16" diameter x 4" deep. Galvanized finish.



High density polyethylene. Resistant to most chemicals. Built-in hand grips and drain holder. For oil, antifreeze or transmission fluid.



Three easy-grip handles with splash guard rim for pouring. Internal baffles prevent liquids from sloshing. Use with antifreeze, oil, transmission fluid & most shop chemicals.



Side-bail handles, baffle plate & pouring lip. 18" diameter x 6" high. Galvanized finish.



Rigid one-piece molded pan with pour spout. 13" diameter overall. Unaffected by gas, oil and most chemicals.


Drain Pans (continued)



Shallow pan catches and holds dripping oil and fluid. 25-3/4" x 17-3/4" x 1" deep. Rust resistant zinc plated — ribbed for rigidity. Leave under car to prevent oil stains in garage.




11-3/4" diameter gunnel on telescoping neck. Neck adjusts 38-1/2" to 68" with thumb screw clamp. Dome top, rub ring bottom, die formed handle/spout. **WARNING:** Use handle when moving oil lift drain.




Fits 95-1300 oil lift drain.

Driving Lights & Accessories



Quartz iodine bulb, 12-volt, 55 watt.




For switching high amperage circuits. Use with 12-volt equipment like lights and horns. Rated for up to 30 amp. About 1" x 1" x 1-1/8" with 1/2" x 3/4" mounting tab.




Draws less than 2 amps to control loads to 25 amp. Rated for continuous duty on 12-volt DC.

Drop Lights, Extension Cords & Accessories




50 watt. For use in standard socket fixtures in motor homes, vans, RVs and boats.



15 watt. Replacement for 9-1208.



13 watt. Replacement for 9-1207.




50 watt. Shatter-resistant, weather-resistant - excellent for outdoor use in exposed fixtures. Long-life, heavy-duty filament, brass base outlasts ordinary bulbs.

Champ 9-366 (4) 75 watt Champ 9-367 (4) 100 watt




50 watt. Vibration resistant, long life bulbs with extra-strong filaments and corrosion resistant brass bases are made for use in drop lights.

Champ 9-357 (4) 75 watt Champ 9-360 (4) 100 watt



Tough, lightweight material housing protects bulb. Insulated 25 ft. cord has plug-in ballast. Uses standard 15 watt fluorescent tube (9-361). 115-volt, AC only. UL listed. Not for explosive atmospheres. Bulb will not get "hot" like incandescent bulb.

Drop Lights, Extension Cords & Accessories (continued)




13 watt bulb in 12-1/2" long lamp. 15 ft. SVT 18/2 cord, 3 conductor plug-in ballast. Built-in switch and shatter-resistant housing. Use Champ **9-365** replacement bulb. No more burns. UL listed. Not for explosive atmospheres. Bulb will not get "hot" like incandescent bulb.



Circuit breaker handle. 16/3 SJT gauge. Metal bulb cage. Cord length: 25 ft. grounded plug and side outlet with bulb switch in handle. 15 amps 125-volt.

Champ 9-1240 (1) 50 ft.




All metal with swing-open cage and integral hook. Clamps onto most drop light handles. For use with grounded units only.




Heat- and break-resistant. Will not heat up like metal cage. Swing-open cage. Clamps onto most drop light handles. UL listed.



Unbreakable plastic. Switch and outlet built-in. Use with 3 conductor cord. Accepts most plastic and metal bulb cages.




18/3 SVT. 50 ft. cord with metal bulb cage. Built-in on/off switch and outlet in handle.



40 ft. cord (no switch in handle). 13 watt. Work light is activated by an automatic switching device on the reel.



16/3 SJO, 30 ft. (neoprene) cord. Grounding plug, side outlet and switch. Rated at 7 amps, 125-volt. Meets requirements for grounding electrical equipment. UL listed. Work light is activated by an automatic switching device on the reel.




8-1/2" diameter aluminum reflector. Mounted with pivoting ball joint to spring clamp. 6 ft., 18/2 gauge SPT2 plastic cord. UL listed. Rated 10 amps 125-volt.






Ultrasonic warning device fits all vehicles. Easy to remove for cleaning. Warning whistle sound is airflow activated at 35 MPH.

Champ 9-2976 (2) Chrome



Round, 33" in length. Protect door edges from chipping and scuffing. Flexible plastic edging conforms easily to door.

Champ 7-813 (2) Chrome, Round Champ 7-815 (2) Chrome, Flat




Universal latch - 4-7/8" long. Molded rubber holds doors and hoods tightly.




Fits most 15" to 16" tires. Rugged fabricbacked vinyl with beaded seam. Industrial grade elastic makes for easy installation.



Fans



8-3/4" tall with 7-1/4" diameter guard. 6-1/4" metal blade is in chrome-plated wire guard. Chromed metal motor housing and base with built-in switch. 12-volt positive or negative ground.



9-1/2" tall with 7" diameter guard, 6" plastic blade. Chrome-plated, steel bracket & wire blade guard. Installs on dash or side panel and is removable. Remote control push-pull switch with mount bracket. 12-volt positive or negative ground.



Chrome plated 8-3/4" x 7-1/4". For RVs, trucks, diesel equipment, aircraft, etc. Ideal for applications requiring 24 volts.

Floor Mats



Complete four piece set. Front dimensions 26-7/8" x 17-1/4", rear dimensions 17" x 12".

Charcoal/Black

9-2684 (4)



Two-piece, full size floor mats are made of heavy molded, natural rubber. Dimensions 27-1/2" x 20". Special waffle-grid design holds water, dirt and grime. Trim to fit.

Black **9-2669 (4)**



Complete four piece front and rear set. Front dimensions 26" x 16-5/8", rear dimensions 16-5/8" x 11-1/4".

Beige/Tan 9-2734 (4)
Black 9-2737 (4)
Gray 9-2735 (4)



Funnels



Equipped with safety screen. Unaffected by water, oil or grease.




Bowl holds over 1 quart — or drop in quart can. Molded vent ribs support can and prevents vacuum lock. Polyethylene construction.



Polypropylene is unaffected by gasoline, oil, etc. Shape holds all rectangular bottles.



Funnel is 5" OD, tip tapers to 1/2" OD. Unaffected by water, oil or grease. Not recommended for solvents. Polyethylene construction.




Use with or without flexible tube. 5-3/4" diameter funnel top, 3/8" OD.



Includes 4", 6" & 8" funnels. Capacities are 1/2 pint, 1 pint & 2 quart respectively.

Funnels (continued)



Capacity: 1/2 pint.



Capacity: 1 pint. Polyethylene construction.



7" diameter, oversized spout with filter screen.



Bevel top 5-1/2" funnel with # 80 mesh screen. Flexible steel hose with 3/8" ID tapered spout. Epoxy finish.



Capacity: 2 quart. Galvanized finish.



Capacity: 5 quart. Galvanized finish.




Spout has 1/2" ID opening. # 80 mesh screen. Galvanized finish.




Lock-on feature holds funnel in position. Removable brass screen. Galvanized finish.

Gas Cans



Heavy-duty all steel construction for safe indoor storage of all flammable liquids.

Spring loaded, self-closing cap provides automatic pressure relief. Safety screen in spout provides fire baffle. Red enamel finish.




Heavy-duty all steel construction for safe indoor storage of all flammable liquids.
Spring loaded, self-closing cap provides automatic pressure relief. Safety screen in spout provides fire baffle. Red enamel finish.


Sales Tip

Recommend your customers keep an empty gas can in their garage or vehicle for emergency situations.

Gasket Material



Use for valve covers & oil pans.
Accommodate compression and flexing of surfaces. Fuel and oil resistant - 1/16" x 12" x 36" in size. Ideal for lining tool drawers & tackle boxes.



1/32" thick. Impervious to fuels, lubricants & antifreeze. Use for engine timing covers, water pumps, thermostat housing & water outlets. 12" x 36" sheets ready to cut to fit for automotive, marine, small engine and compressor use.


Champ 135142 (1) - 1/16" thick




Replaces compressed asbestos materials. For high pressure-temperature applications. Withstands temperature up to 350° F. Size: 1/32" x 12" x 18".

Gauge Kits


- Know the condition of your engine and electrical system with pre-assembled multi-gauge kits
- Full size 2-1/16" diameter gauges feature black faces with crisp white markings and red indicator
- · Includes gauges, mounting panel with optional woodgrain insert, sending units, adapters and installation hardware



Oil Pressure/Water Temperature. Back lit. Panel size: 5-1/8"W x 2-7/8"H.



Oil Pressure/Water Temperature/Ammeter. Full sweep, back lit & tilt tube mounts. Panel size: 7-1/2"W x 2-7/8"H. Tilt tube adjusts to aim gauge towards driver.




Oil Pressure/Water Temperature/Ammeter. Back lit. Panel size: 7-1/2"W x 2-7/8"H.

Gauge Panels

• Gauge Panels: Heavy-gauge metal for under dash installation of 2-1/16" diameter gauges



5-1/8"W x 2-7/8"H overall dimensions. Includes optional woodgrain & black panel inserts.




2-5/8"W x 2-7/8"H overall dimensions. Includes optional woodgrain & black panel inserts.

Gauges - Ammeters


- Ammeters monitor and measure the level of power generated by vehicle's charging system
- Show the battery and electrical system condition through charging or discharging
- These gauges will indicate equipment failure, loose or faulty belts and excessive loads
- · "Complete Kit" includes gauge, mounting panel with optional wood grain panel inserts and installation hardware
- Full size 2-1/6" diameter gauges feature black faces with crisp white markings and red indicator




Narrow sweep & back lit. -60 to +60 amperes. Panel size: 2-5/8"W x 2-7/8"H.



Narrow sweep & back lit. -60 to +60amperes.




Wide sweep, back lit & tilt tube mount. -60 to +60 amperes. Panel size: 2-5/8"W x 2-7/8"H. Tilt tube adjusts to aim gauge towards driver.




amperes. Panel size: 2-5/8"W x 2-7/8"H.

Gauges - Fuel Level


- Use heavy-duty electric gauges in cars, trucks, motorcycles, off-road vehicles and industrial applications where normal gauges won't hold up
- · Gauges are vibration, temperature and moisture resistant
- Full size 2-1/16" diameter gauges feature black faces with crisp white markings and indicator




Wide sweep & back lit. For Ford & Chrysler vehicles with OE sender.



Wide sweep & back lit. For GM vehicles with OE sender.




Wide sweep & back lit. For AMC & Jeep vehicles and replacement for Stewart Warner gauges or use Champ 7-199 sender.



Use with Champ 7-196 electric fuel level gauge. Adjusts for tank depth of 5" to 27". Includes screws and gasket.

Gauges - Oil Pressure


- Proper oil pressure is critical to the life of an engine
- An oil pressure gauge lets you monitor the actual pressure, not just to see the "oil" light when it is too late
- Full size 2-1/16" diameter gauges feature black faces with crisp white markings and red marker
- . "Complete Kit" includes gauge, mounting panel with optional woodgrain panel insert, sending unit or tubing, adapters and installation hardware



Range: 0-100 psi (0-7 kg/cm²). Panel adjusts to aim gauge towards driver.




kg/cm²). Panel size: 2-5/8W" x 2-7/8"H.




270° sweep, back lit & tilt tube mount. Range: 0-100 psi (0-7 kg/cm²). Panel adjusts to aim gauge towards driver.



(0-7 kg/cm²).



Wide sweep & back lit. Range: 0-100 psi (0-7 kg/cm²). Heavy-duty gauge is vibration, temperature and moisture resistant.



270° sweep & back lit. Range: 0-100 psi (0-7 kg/cm²). Use **7-902** installation kit.



Narrow sweep & unlighted. Range: 0-100 psi (0-7 kg/cm²). Use **7-902** installation kit.




Narrow sweep & unlighted. Range: 0-40 psi (0-3 kg/cm²). For older vehicles, farm & offroad equipment. Use 7-902 installation kit.



Includes brass fittings & 6' copper tubing. Ideal for applications where tube must pass near manifolds or other hot components.



Six feet of 1/8" plastic tubing and fittings. Use with **7-101**, **7-121**, **7-133** & **7-142**. Plastic tubing is more kink resistant than copper and easier to route. Dorman® 705-094 (1)



Electrical gauges have remote sensors eliminating the need for tubes running from the interior of the engine. This simplifies installation and is safer.

- Install in 12-volt vehicles with negative ground electrical systems, point or electronic ignition
- Not for use on diesel engines or engines with distributorless ignitions
- Metal housing with chrome plated bezels
- Gauges feature black faces with crisp white markings and indicator with adjustable "red line" needle



270° sweep, back lit with zero adjustment.

Champ®

Complete Kit, Chrome - Mechanical

270° sweep back lit 3-5/8" dial with

270° sweep, back lit, 3-5/8" dial with zero adjust.

Gauges - Temperature


- Temperature gauges can monitor coolant, oil (useful on highly stressed or turbo charged engines) or automatic transmission fluid temperatures
- Full size 2-1/16" diameter gauges feature black faces with crisp white marks, green & red "safe zone" indication and red needle
- "Complete kit" includes gauge, mounting panel with optional wood grain panel insert, sending unit, adapter fittings and installation hardware



Wide sweep, back lit & tilt tube mount.
Range: 130-290° F/60-140° C. Panel size:
2-5/8"W x 2-7/8"H. Tilt tube adjusts to aim gauge towards driver.



270° sweep, back lit & tilt tube mount. Range: 130-280° F/50-140° C. Panel size: 2-5/8"W x 2-7/8"H.




Narrow sweep & back lit. Range: 130-290° F/60-140° C. Panel size: 2-5/8"W x 2-7/8"H.



Complete Kit, Chrome - Mechanical
Narrow sweep & back lit. Range: 130-280° F/50-140° C. Panel size: 2-5/8"W x 2-7/8"H.



270° sweep, back lit & tilt tube. Range: 130-280° F/50-140° C. Panel size: 2-5/8"W x 2-7/8"H. Tilt tube adjusts to aim towards driver.




Narrow sweep & back lit. Range: 130-290 $^{\circ}$ F/60-140 $^{\circ}$ C.




Gauge & Sender, Chrome - Mechanical

Narrow sweep & back lit. Range: 130-280° F/50-140° C.




Narrow sweep & back lit. Range: 130-280° F/50-140° C. Same as **7-111** but with 96" capillary tube. Ideal fro rear engine cars.



270° sweep, back lit & tilt tube. Range: 130-280° F/50-140° C.

Gauges - Temperature (continued)




Heavy-duty, wide sweep & back lit. Range: 100-280° F. Heavy-duty gauge is vibration, temperature and moisture resistant.

Sales Tip Electrical gau eliminating th from the inter simplifies ins

Electrical gauges have remote sensors eliminating the need for tubes running from the interior of the engine. This simplifies installation and is safer.

Gauges - Vacuum & Elapsed Time Meters



Elapsed Time Meter. Accurate to within 1% from -65° to +160° F. Operates on 8-50 volts DC, negative ground. Fits 2-1/16" diameter panel opening. Records engine hours or equipment operation time to the tenth of an hour up to 9,999.9 hours.

Sales Tip


Elapsed Time Meters (or hour gauges) are useful for off road and stationary equipment to indicate when service should be performed.

Gauges - Voltage

- · Monitor battery and charging system operation
- Indicates problems with a dead battery cells and bad voltage regulators
- Full size 2-1/16" diameter gauges feature black faces with crisp white markings and red indicator
- "Complete Kit" includes gauge, mounting panel with optional woodgrain panel inserts and installation hardware



Narrow sweep & back lit. Calibrated 8-16 volts. 2-5/8"W x 2-7/8"H overall panel dimensions.



Wide sweep & back lit. Calibrated 8-16 volts. Heavy-duty gauge is vibration, temperature and moisture resistant.

Unlined with gunn cut and elastic wrist band.



Brown jersey with matching knit wrist band. Clute cut.



Leather palms, thumb, first finger & fingertips. Gunn cut.




Soft knit full lining with knit wrist. Vinyl coating resists acids and caustics.




Grease Gun Accessories


· Adapters, hoses and couplers reach hard to grease areas and fittings



Rotates & locks to help reach hard-to-get fittings. Threaded 1/8" NPT. Includes coupler.



Converts jaw type lube couplers to needle points. Threaded 1/8" NPT. Use with hand grease guns. Dispenses fine line of grease to hard-reach areas.



Dispenses a fine, controlled line of grease. Lubricates bearings, spindles & shafts. Threaded 1/8" NPT.



For hard-to-reach grease fittings. Comes with large and small sleeves. Recommended working pressure 4,000 psi. Threaded 1/8" NPT.




Hardened jaws. Neoprene seal. Spring-loaded check valve. Threaded 1/8" NPT. **Dorman® 486-961 (1)**




Spring loaded ball check valve. 1/8" NPT female threads. Recommended working pressure 4,000 psi.


Grease Gun Accessories (continued)




Hardened steel needle is ideal for sealed bearings. Use for hinge pins & between leaves of springs. Snaps onto grease gun coupler. Sheath, not shown.



18" - up to 5,000 psi. 1/8" NPT male ends.



12" - up to 3,000 psi. 1/8" NPT male ends.



18" - up to 3,000 psi. 1/8" NPT male ends.



3 oz. mini-size cartridges. For **9-783** and other mini grease guns. Package of 3.

Grease Guns

· All grease guns include extension and coupler



Knurled steel barrel, neoprene plunger & 11" hose. Use with non-corrosive fluids.



Delivers charge of grease up to 6,500 psi. One-hand operation with trigger press action. Requires 90-150 psi air supply. Accepts 1/4" NPT air line fitting. Three - way loading: cartridge, dispenser or bulk.



Ball check valve delivers up to 10,000 psi. Knurled steel body. Three - way loading: cartridge, dispenser or bulk.



Develops up to 10,000 psi pressure. Full pressure with short strokes in close spaces. Knurled body has non-slip lever handle. Three - way loading: cartridge, dispenser or bulk. Features loader and bleeder fittings.



Heavy-duty gun delivers up to 6,000 psi. Knurled steel barrel. Positive action plunger. Two - way loading: cartridge or bulk.



Trigger operated, develops up to 3,500 psi. Uses 3 oz. cartridge (**9-1555**).

Horns & Back-Up Alarms



Extra loud alarm is perfect for large trucks, farm and off-highway equipment. High frequency "beeping" pulse warns when you are backing up. Wires into existing backup light circuit (instructions included).



Clear, but unobtrusive alarm is ideal for cars, light trucks, golf carts & fork lifts. High frequency "beeping" pulse warns when you are backing up. Wires into existing backup light circuit (instructions included).



The extra volume, 132dB at 4", helps command attention in noisy and high speed traffic. Universal for single or dual terminal installations. Includes mounting bracket and hardware. 4" x 3-1/2" x 2-1/2".



The extra volume, 132dB at 4", helps command attention in noisy and high speed traffic. Universal for single or dual terminal installations. Includes mounting bracket and hardware. 4" x 3-1/2" x 2-1/2".



130dB rated. 12-volt disc-style horn. Single or dual terminal connection. Universal bracket for easy installation.




130dB rated. 12-volt disc-style horn. Single or dual terminal connection. Universal bracket for easy installation.



Universal single or dual terminal installation. Rated 125dB (minimum) at 4". Size: 4" x 3-1/2" x 2-1/2".




Universal single or dual terminal installation. Rated 125dB (minimum) at 4". Size: 4" x 3-1/2" x 2-1/2".



Interior Accessories



12" x 8" weatherproof plastic sign. Printed in black and fluorescent red. Punched for hanging.



Expands from 31" to 60". Corrugated plastic keeps hangers from sliding. Soft plastic tips help prevent scuffing.




1-13/16" diameter, cushion feel. Fits 5/16", 3/8" & 1/2" shafts. Five popular shift patterns. Includes self-adhesive metallic inserts for popular 3-, 4- & 5-speed shift patterns. Stitched vinyl cover has cushioned feel.

,


Interior Accessories (continued)



Strong magnet holds key locker securely to flat metal surface. Slide-open metal holder is 2-1/2" x 1".



Clamps onto steering wheel rim and allows one-handed spinning of the wheel. Heavy-duty design for tractors, farm and off-road equipment, etc. Enamel finished hardwood spinner knob. Rust resistant plated steel bracket.



Highly visible theft deterrent. Twin hook design for greater security.




Clear acetate window protects documents. Holds documents up to 3-1/2" x 6-1/4". Straps onto sun visor.

Sales Tip


Promote the top selling interior & exterior accessories in one compact display. See pages 57-58

License Plate Brackets & Frames


• Use to replace broken OE plate brackets and frames as a retro fit for vehicles that didn't originally have front plates




Textured molded plastic frame. 12-1/4" x 6-1/2" x 1-5/16". Includes mounting hardware.



Heavyweight chrome plated frame with acetate window, galvanized steel back and assembly screws. 12-1/2" x 6-1/2" x 1-3/16".




Plastic chrome plated. 12-3/16" x 6-1/2" x 1/6".




Used to attach temporary plates to demonstrator and in-transit vehicles. Permanent magnet is plastic coated to prevent scratching paint and chrome.



12-1/16" x 6-1/16" x 1/8". Acrylic shield covers face of license plate. Keep license plate clean and looking new.



Dry powder for locks, latches, clocks and reels. 1/4 ounce (6.5 grams) squeeze tube.




Graphited oil lubricates cables, locks, etc. 1/2 ounce squeeze tube.



Moisture resistant. Lubes & protects tools, hinges, gears, etc. 2 ounce tube.

Measures & Fillers



Hot dip galvanized have splash resisting tops and easy-grip formed handles.

2-quart capacity **9-834 (1)** 4-quart capacity **9-836 (1)**



Crankcase fillers with flexible spout have thumb operated valve to control flow. Recessed bottom drains fully. All steel with non-spill top and side handles.

4-quart capacity 9-847 (1) 5-quart capacity 9-845 (1) 8-quart capacity 9-837 (1)



Rigid one-piece molded polyethylene. Unaffected by grease, oil, gasoline or antifreeze.

2.5-gallon capacity **9-807 (1)**

 $\Lambda \Lambda$



Hot dip galvanized with formed back handle. Long neck has resting lug at spout. 3-gallon capacity **9-840 (1)**

Mechanics Wire

- Easily formed black annealed all purpose wire
- Great for temporary wiring parts out of the way
 Keep in your vehicle for emergency repair
- Use to unclog and clean small EGR, PCV and vacuum parts

Gauge	Size	Champ Part # (Qty.)	Dorman Part # (Qty.)
16	2 pound spool	9-741 (1)	110-250 (1)
18	2 pound spool	9-742 (1)	110-200 (1)
18	50 ft. coil	9-743 (1)	







For additional gauges and lengths of mechanics wire, refer to page 40 of Dorman Automobile Hardware and Hard Parts, DOR2031.

Merchandising Supplies



on bag for writing. Box of 100.





Sales Tip

Organize and utilize your store's space. See the Champ® assortment section for merchandising ideas.

Mirrors



Convex mirrors provide wide angle view to help eliminate "blind spots". Permanent pressure-sensitive adhesive backs for easy installation on glass or other flat surfaces.



Replacement mirrors attach directly to most OE windshield mirror mounts or install with included mount and cement. Day/night positions to reduce headlight glare.

Champ 7-867 (1) 10" Champ 7-893 (1) 12"

Sales Tip

For a complete line of replacement mirror glass, refer to the LOOK! catalog. (LOOK 1208)

Oilers

· Full drawn steel bodies and caps



6" rigid spout, epoxy finish.



6" rigid spout, epoxy finish.



6" rigid spout, epoxy finish.



9" flexible spout, 1 pint with lacquer finish. Zinc plated trigger and removable spout.




6" rigid spout, 1 pint with lacquer finish. Zinc plated trigger and removable spout.

Pins - Bent Pull, Hitch & Linch



trailer receivers.

3" usable length 158700 (1) 5/8" diameter




Machined, heat-treated alloy steel with large lift ring and clevis clip.

158707 (1)	3/8" diameter	3" usable length
158708 (1)	1/2" diameter	3-1/2" usable length
158701 (1)	5/8" diameter	4-1/2" usable length
158702 (1)	5/8" diameter	6" usable length
158703 (1)	3/4" diameter	4-1/2" usable length
158704 (1)	3/4" diameter	6" usable length
158705 (1)	7/8" diameter	6" usable length
158706 (1)	1" diameter	6" usable length




5/16" diameter x 1-5/8" 158803 (1) 7/16" diameter x 1-5/8" 158804 (1) 158805 (1) 1/4" diameter x 1-3/4"


Pumps & Siphons




Self-priming pump siphons liquids and pumps air. Transfers liquids like gasoline & antifreeze. Drains crankcase oil with special dipstick tube. Includes pump, liquid intake and discharge hoses, dipstick tube, air pressure hose, hose connector, threaded adapter for inflator needles and instructions.



Die-cast head with threaded discharge spout. Use with garden hose fittings. Fits 2" bungs, adjusts for drums up to 35" deep.




Die-cast steel head and base. Bung adapter & telescoping tube fit 15 to 55 gallons. Discharge spout threaded for water hose fittings. Removable 3/4" steel spout.



Dispenses approximately one ounce per stroke. Includes adapters to fit most gallon cans. 36" flexible tube has check valve in nozzle.




Self priming, 3-1/4 gallons per minute @25 psi. Use with 1/4" or larger electric drill. Hose fittings, suction tube, adapter & hose included.




Use for non-corrosive petroleum based fluids. For fluids light to medium viscosity. Rugged cast iron housing & steel discharge pipe. Three heavy-duty vanes allow for better draw. Telescopic 42" steel suction pipe.

Pumps & Siphons (continued)



High-volume dispenser for use on heavytype pails. 2.5 oz per stroke, 51 strokes per gallon. For motor oils, transmissions fluids & oils. Includes 4 ft. oil resistant hose and pail cover.



Tough polyethylene w/double-action check valves. Siphons gasoline and other liquids.

Radiator Coolant Recovery & Flush Kits

• Convert "open" cooling systems or replace original equipment recovery system




Plastic-coated wire basket is form fitting. Fits 6"W x 4"D x 7"H space. Includes reservoir with screw-on radiator pressure cap, tubing, clamps and hardware.



Reservoir with snap-on cap attaches to fender well. Includes basket, overflow tubing and hardware.




Better fitting kit for today's compact vehicles. Reservoir with snap-on cap attaches to fender well. Includes basket, overflow tubing and hardware.



Kits include tee, cap, hose clamps, garden hose adapter & instructions. Flushing tee installs in heater hose, makes back flushing easy.

Champ 9-1748 (1) 5/8" hose



Repair Kits



Repair fuel tank without removing or draining tank. For rusted-out areas, cracks, rock holes. Resin mixes in sealed bag. Includes mastic stick to temporarily stop the leak, two-part epoxy resin, fiberglass cloth, abrasive paper & brush.



For chips and breaks up to 1" in diameter. Bonding action stops radial cracks from traveling. Kit includes resin, syringe, pedestal and seal. Special epoxy resin with vacuum/pressure applicator fills and refinishes breaks, restores visibility through repair area.

P

2 filters with paint pre-filters & retainer rings.

Seat Covers, Cushions & Belts



Fits 60" wide full size pickup bench seat. Strong, durable, easy-care fabric with vinyl trim. Elasticized for snug installation. Includes handy storage pockets on front skirt. Color: Black/Grey.



Extra large 19" wide, 15" seat, 19" back. Crush resistant, tempered steel inner springs. Acrylic coated fiber open weave cover. Reversible: Black/White & Red/White/Blue.



Black, nylon webbing with push button quick release buckle. Meets or exceeds all state & federal requirements including FMVSS 209. Includes standard hardware.

Champ 7-824 (1) 90"

Shop Equipment & Supplies



Swivel-angel offset wheels roll in any direction. 2-9/16" x 1-11/16" base plate. Four wheels per box.



Tough leather-grained vinyl with non-slip backing. 24"L x 36"W. Protects car finish from dirt, grease & scratches. Sewn-in ribs to hold tools and parts on cover.



Lift-rated for 3,000 pounds. Lift range 3-3/4" to 14". Operates under full-size to subcompact cars.



Size: 1-7/16" x 1-9/16". Hardened steel shackle, size: 1-3/16". Includes 2 keys. Ideal for shop, home, shed, office, school, etc.



Size: 1-1/4" x 1-3/4". Hardened steel shackle, size: 2-1/4". Includes 2 keys. Ideal for shop, home, shed, office, school, etc.



Size: 1-1/4" x 1-1/2". Hardened steel shackle, size: 7/8". Includes 2 keys. Ideal for shop, home, shed, office, school, etc.

R

8

Shop Equipment & Supplies (continued)



Heavy-gauge, one piece molded plastic. Flanged top and pouring lip. Wire bail handle.



Generous size of 15" x 18" (38.1cm x 45.7cm). Fiber mats protect carpets from soil and grease. Show customers you care about their car.



Rugged protection against dirt, grease, paint, etc. Avoid costly, time consuming cleaning. Comes in handy dispenser box of 125. Special 2-ply "Slip & Grip" plastic grips seat while allowing you to slide easily. Generous length covers high-back and bench-style seats. Perfect for fabric, leather and vinyl seats.

9-268 (4) **Champ®** Shop Towels, 4 Pack

Machine washable, red, hemmed towels, Ideal for auto shops, home, office, etc. Professional quality, absorbent and reusable. Towel size is 13" x 15".

Champ 9-273 (12) 12 Pack Champ 9-233 (25) 25 Pack Champ 9-243 Display Box

Splash Guards

· All splash guards are sold as pairs with mounting hardware



13-1/4" L x 7-1/4" W. Fits front or rear of most vehicles. Grained finish plastic can be trimmed. Black.




15-3/4" L x 8-1/2" W. Made especially for minisize trucks, vans, SUVs. Easy installation with perma-clamp mounting system. EVA plastic is more durable than rubber. Black.



18" L x 12" W. Universal fit for fenders of full-size vehicles. Reinforced edges provide rigidity and durability. Black.



13-1/4" L x 19-1/4" W. Molded rubber for trucks, campers & vans. Black.



20" L x 9-7/8" W overall. 13-1/4" stainless steel guard, 6-3/4" vinyl flap. Heavygauge, mirror polished stainless steel and black vinyl.



Splash guards keep your car cleaner longer and help prevent rock chips.

Steering Wheel Covers

- · Easy to install, lace-on style and padded for comfort
- · Stretchable to fit most vehicles



Easy wrap-on installation.

Black, 14" to 16" dia. 7-840 (1)
Black, truck - 17" to 22" dia. 7-847 (1)

Tape



3" x 30' roll. Waterproof, heat and corrosionresistance. Tough adhesive backing. Use indoors or outdoors for sealing and repairing.



1/2" x 60" roll, OE approved. Re-attach auto molding easily and securely. Double-sided, high strength and waterproof.

Dorman® 701-396 (1) TAPE-UP!® 48105 (1) Carded



1/16" thick x 3/4" wide (72" roll). Permanent pressure-sensitive adhesive. Use indoors or outdoors. Mount mirrors, tape down floor mats, etc.

Dorman® 701-395 (1)




Developed for sealing air ducts and for may other uses in garage, shop, plant and home. Silver color cloth reinforced tape with strong, permanent adhesive resists heat, cold and moisture.

Champ® 9-1649 (1) 2" x 60' Roll



3/4" x 60' roll, U.L. listed. Suitable for use on applications which do not exceed 600 volts and where temperatures do not exceed 80°C (176°F).



Includes 1" x 4" hook strip & matching loop strip. Permanent pressure-sensitive adhesive. Cut to size with scissors. Press-on, peel-off convenience for mounting mirrors, cell phones, clocks and other accessories.



Red, 2" x 60" roll. Lasting repairs for cracked or broken lights. Transmits same light intensity as original lens.

Dorman® 705-450 (1)



Amber, 2" x 60" roll. Lasting repairs for cracked or broken lights. Transmits same light intensity as original lens.

Dorman® 705-451 (1)



3/16" thick x 1-1/2" wide (30' roll). Sponge rubber with pressure-sensitive adhesive. Seals out moisture and dust. Prevents creaking & squeaking. Designed specifically to seal pickup truck camper caps.

Dorman® 705-441 (1) TAPE-UP!® 48145 (1) Carded



For quick repair of radiator and heater hoses. Waterproof and temperature-resistant. 2" x 15' roll.



1-1/2" x 30" roll. Use as safety markings on vehicles, bikes, etc. Permanent pressuresensitive backing. Affixes to most clean, dry surfaces.



1/2" x 600". More than twice as much as a normal roll. Use for pipe thread connections. Resists heat, cold, chemicals & moisture. Wrap tape over male threaded part in opposite direction of threads. Two or more layers may be required depending on fit.

Tie-Downs & Rope



Tie-down bolt with 1-1/6" eye. Installs in 1-1/4" x 2" stake hole of truck. Tighten bolt to secure rubber block.




Installs in 1-1/4" x 2" stake hole. Chrome plated, die cast zinc alloy anchor. Tighten anchor to expand and secure rubber block. Includes chrome plated steep top plate with gasket and threaded steel compression plate.




1/4" diameter. 1,250 lbs. rating. 200 ft. in length.




1/4" diameter. 1,000 lbs. rating. 50 ft. in length.



Pre-formed to assemble tie-downs using 7/16" rope.




Solid, molded rubber with plated steel hooks. Rectangular stretch section resists twisting. Box of 25.



Solid, molded rubber with plated steel hooks.
Rectangular stretch section resists twisting.
Champ 7-257 (6) 21" 36" Extended


Champ 7-257 (6) 21", 36" Extended Champ 7-255 (6) 31", 47" Extended




Fabric covered with plastic coated steel hooks. 9/32" diameter elastic cord.

Tire Gauges

• For best accuracy, select the tire gauge with a max reading closest to the desired tire pressure



Square nylon indicator bar in 2 lb steps. 30° angle gauge. Metal ring for chain attachment.




Square nylon indicator bar in 2 lb steps. Chrome-plated, straight-on and 30° angle gauge. Use on pickups, RVs, heavy trucks, etc.




Square nylon indicator bar in 2 lb steps. Chrome plated brass barrel with pocket clip.




Nylon marker in 1 lb steps. Chrome plated brass barrel with pocket clip. Use on passenger cars, vans and light trucks.



Nylon marker in 2 lb steps. Chrome plated barrel with pocket clip.



Calibrated in 1/32" increments. Measures tread depth on tire. Includes pocket clip.



Tire Inner Tubes

- Tubes fit passenger cars, trucks and boat trailers
- Fits most popular sizes for bias and radial tires
- For dual wheel applications, use tube #9-3306

Туре	Part # (Qty.)
700/750R x 15/16 Radial & Bias Truck Tube	9-3306 (1)
G/GR x 13/14/15 Radial & Bias Tube	9-3302 (1)
G/GR/K/KR x 16 Radial & Bias Tube	9-3305 (1)
K/KR x 14/15 Radial & Bias Tube	9-3303 (1)
M/MR x 14/15 Radial & Bias Tube	9-3304 (1)




Tire Repair - Wheel Weights

- · Use on mag, sport wheels and other tires that will not accept clip on weights
- · Permanent, pressure sensitive backing
- · Clip off for exact weight needed
- Marked in 1/4 ounce increments






Tire Repair Chemicals



1/4 pint bush top can. Use with chemical patches, cold patches & plugs.



1/2 pint brush top can. Use for patches, plugs, boots, Magicure® & Pli-Seal®. Champ® 9-656 (1) 1 Quart




For fast, easy tire mounting. Helps seat bead and prevent bead damage. 26 ounces of concentrate makes one gallon of lubricant.



1 quart can. Ensures effective repair of tubeless tires. Prepares surface, removes silicon & soapstone.



1 quart can w/brush top. Brush on bead when mounting tubeless tires. For positive seal with rim to prevent air seepage.

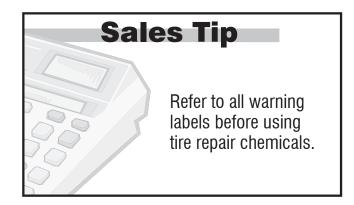

Tire Repair Kits



Head of plug expands inside tire. Plug vulcanizes chemically for permanent repair. kit contains 50 3/8" plugs **(9-600)** and tip, 15 7/16" plugs **(9-611)** and tip, Magicure® Jiffy Gun, probe and vulcanizing cement.



Not for speed rated tires. Kit contains T-handle tire probe, T-handle open-eye tool, tube of cement and 5 string repairs.



Not for speed rated tires. Contains 20 four - inch radial inserts, 1/2 pint cement, T-handle open-eye needle tool and T-handle tire probe.



For simple punctures, except in steel belted tires. Contains 6 strip repairs, cement and one open-eye needle.



For simple punctures, except in steel belted tires. Contains 3 strip repairs, cement and one open-eye needle.



Kit includes 2 round radial patches, 2 oval radial patches, 1 tube of cement and a buffer. Approved for use on speed rated radials.



Not for speed rated tires. Contains 1 openeye needle tool, 1 tire probe, 3 radial inserts and 1 tube of cement.



Contains 5 repair strings and 1 closed-eye needle. Not for speed rated tires.




Contains 5 string refills and 1 tube of cement. Refill kit for **9-639**. Not for speed rated tires.



General purpose repairs for auto & bicycle tires. 12 kits contained in "hanging" display box. Medium kit with three square patches, 8 square inches of patching rubber, cement and buffer. Not for use on Radial tires.



General purpose repairs for auto & bicycle tires. Small kit contains two round patches, buffer and cement. Not for use on radial tires.



Tire Repair Patches, Plugs & Strings

• Use Champ® tire repair cement, lubricants and Rub-R-Flux with your tire repairs



Magicure® Pli-Seal Vulcanizing Strips		
Size Part # (Qty.		
Car & Light Truck	9-691 (50)	



Patch-N-Plug®		
Size Part # (Qty.)		
For Pinhole Repairs	9-607 (20)	



String Repair		
Size	Part # (Qty.)	
4" Fat String Repair	9-649 (50)	
4" Radial Repair	9-623 (25)	
7" Bias-Ply & Radial Repair	9-627 (50)	
7" Narrow String Repair	9-651 (50)	
7" Radial Heavy-Duty Truck Repair	9-629 (25)	



Radial patch, Round Vulcanized		
Size	Part # (Qty.)	
1-5/8" Diameter	9-724 (30)	
2-1/4" Diameter	9-725 (25)	
3-1/8" Diameter	9-726 (15)	



Tube & Tubeless Patch, Round Vulcanized		
Size	Part # (Qty.)	
1-3/4" Diameter	9-620 (40)	
2-1/4" Diameter	9-622 (30)	
3-1/8" Diameter	9-624 (20)	



Magicure® Tire Repair Kit (Refills for 9-593)		
Size Part # (Qty		
3/8" Plugs	9-600 (25)	
7/16" Plugs	9-611 (15)	




Radial Tire Plug		
Size	Part # (Qty.)	
1/8" Hole Size	9-604 (15)	
1/4" Hole Size	9-605 (10)	




Permanent weather and waterproof white paint crayon highlights tire lettering, marks tires and writes on other difficult materials. Marks on oily, slick, wet, cold or dry surfaces.



Marks tires, tubes, cartons, etc. Package of 2. Champ® 9-682 (12) Box of 12.



1-3/4" x 21" barrel has ball check valve. Baked enamel finish. 24" reinforced hose, quick-connect lock-on chuck.



Presses patch or boot for secure repair.



Four tire repair tools in on 4" T-handle. All four tools store in handle. Includes spiral probe, open and split eye needles.



Molded plastic T-handle provides sure grip. For use with long black narrow string repairs.



Rust resisting, bright plated all metal design. Complete with split-eye needle for string repair. Extra strong solid metal T-handle.



Molded plastic T-handle provides sure grip. Use with rubber plugs and inserts.




Cleans and prepares for repair. Molded plastic T-handle provides sure grip. Spiral probe cleans injury and prepares it for plugging.




Molded plastic T-handle provides sure grip. Use with the 4" brown string repairs.



Molded plastic T-handle provides sure grip. Use on all tires including steel-belted radials. Prepares puncture for plugs with a sharp point and rasp-like probe.



Galvanized after forming for positive seal. 31-1/4" x 11" x 12" in size. For standard & wide auto and light truck tires.



Makes application of tire lubrication fast & easy. 2-1/2" diameter x 6-3/4" tufted cotton swab. Twisted wire handle, 10-1/2" in length.




Tech Tip

• Reduce chance of blow-outs See page 39 for tire gauges

Tire Valve Parts

• To insure proper balance, metal valve extensions and caps should be mounted on wheel before balancing



7" long dual wheel w/bracket. Long lasting braided metal hose cover. Heavy-duty wheel clamp.


Tire Valves - Tubeless

- Each includes valve core and cap
- Replace tire valves whenever replacing a tire to prevent leaks from old valves
- Snap-in valve stems are available carded in quantities of 4, or boxes of 10 and 50



Туре	Length	Rim Hole Dia.	TR#	Champ Part # (Qty.)	Champ Part # (Qty.)
Clamp-In	1-1/4"	.453" & .625"	416	9-1005-4 (4)	9-1005-50 (50)
Snap-In	1-1/4"	.453"	413	9-1009 (10)	9-1009-50 (50)
Snap-In	1-1/2"	.453"	414	9-1013 (10)	9-1013-50 (50)
Snap-In	2"	.453"	418	9-1011 (10)	9-1011-50 (50)


Tools




Plastic applicators to spread plastic body fillers. Set of three: 4" x 2-3/4", 4-5/16" x 2-5/8" and 5" x 2-7/8.




Heat treated malleable iron frame. Freeturning swivel pressure buttons. 4" maximum capacity. For a complete selection of C-Clamps, refer to the Metal Work! Welding Accessories section, page 91-92.




Single cut for smoothing and finishing metal. Ideal for sharpening tasks.



High-speed molybdenum Steel. 24 teeth per inch. Holds edge and sets longer. Cuts harder materials than carbon steel blades.




Tubular steel frame. Adjusts to accept 10" & 12" blades. Thumbscrew blade tensioner with molded handgrip. Includes 12 blades.



36" handle for 10 lb to 16 lb sledge hammers.

7


Tools (continued)




All steel, hot forged for extra strength. Fits tire mounting lug nuts of most vehicles. Four hex socket sizes: 11/16", 3/4", 13/16" & 7/8".



Industrial quality blades for scrapers. Package of ten.



Metal handle with retractor button. Holds single edge steel or plastic blade. Use with Champ® blades: 9-1699. Includes one steel blade.




Handle swivels and locks in three positions. Uses single edge steel or plastic blade. Use with Champ® blades: 9-1699. Includes one steel blade.



Handy size pads about 3" x 4" x 3/4" thick. Prepares surfaces for the final finish. Cleans copper and brass. Package of 8.


Champ® 9-1986 (8) Grade: Medium



1/2" wide yellow epoxy coated tape. Graduated in 1/16" (first foot in 1/32"). Plastic case, thumb lock and belt clip.



Make single or double flares on tubing up to .040" wall. Hinged steel block, wing nuts & serrated cavities to clamp tube securely. Forged steel compressor has "T" handle. Use with 3/16", 1/4" 5/16", 3/8" 7/16", 1/2" & 5/8" OD tubing.



Five heavy-duty blades for 9-1788 and other knives.




Blade locks in four positions: fully extended, carton opening, slitting and fully retracted. Die-cast metal handle stores extra blades. Packaged with three blades.



Tools - Tune-Up and Automotive



Glass float, coded in Fahrenheit and Centigrade. Works with hot or cold coolant. Indicates freeze points for ethylene glycol antifreeze from +10° to -30°F and methanol from +10° to -40°F.



Test strength of ethylene glycol antifreeze. Hot or cold. Direct reading dial shows freeze and boiling points in Fahrenheit and Centigrade.



Floating balls indicate degrees of freezing & boiling protection. Works with hot or cold ethylene glycol antifreeze.



Tests high and low voltage. Internal lamp indicates presence of 12 volts. Neon bulb checks for high voltage secondary. Locates plug wire breaks and fouled plugs.



Excellent fluid abrasive for seating engine valves. 2 oz. each of both coarse (120 grit) & fine (280 grit) silicon carbide compound (grease mix).



Save the cost of a new cylinder head. Use kit to retap oversize and insert steel inserts. For use with 14mm spark plugs. Kit includes special combination tap and reamer, four inserts in 3/8", 7/16", 1/2" and 3/4" lengths.



Inductive pickup with protective nose. For Standard, HEI & DIS systems. Long leads with heavy-duty clips. Brilliant Xenon tube for use in bright areas.



24" long double-ended unlocking tool. Hook end & split-fork end fits most locks. **HELP!® 75491 (1) Carded**




11-piece tool kit. Will unlock over 95% of all cars and trucks. Kit includes gas cap tool, wide bar, thin bar, dual tool, plastic latch tool, side lock tool, 2 window wedges, 2 bar handles, GM type door tool and instructions. For professional and/or emergency use only.


Tow Straps & Ropes



Adjusts 4' to 15'. 1,500 lbs rated capacity. Ratchet action to bind and tie down loads. Positive locking ratchet has quick release lever.



Size: 5/8" x 12'. 6,000 lbs breaking strength. Rot and weather-proof braided rope. Steel hooks included.



Size: 2" x 20'. 18,000 lbs rated capacity. Stretch and recoil action up to 20%. Lightweight nylon with reinforced sewn loops.

Size: 2" x 15'. 10,000 lbs rated capacity. Weather and chafe-resistant strapping with hooks.

Weather Stripping

- Insulating tape for RV, boat, car or home
- Easy to apply with pressure sensitive backing


PVC Sponge Foam		
Width	Thickness	Champ Part # (Qty.)
3/8"	3/16"	9-1488 (1)
3/8"	5/16"	9-1489 (1)
3/8"	7/16"	9-1490 (1)
1/2"	9/16"	9-1496 (1)
3/4"	5/16"	9-1491 (1)

- Stop leaks and moisture, deadens noise & eliminates drafts
- 10 foot rolls

PVC Sponge Foam (continued)		
Width	Thickness	Champ Part # (Qty.)
3/4"	7/16"	9-1492 (1)
1"	5/16"	9-1493 (1)
1"	7/16"	9-1494 (1)
1"	9/16"	9-1495 (1)



Window Brushes, Squeeges, & Scrapers




1/4" thick blade has molded-in ice chippers for ice. 9" scraper has textured handle for extra reach. Curved blade for extra leverage. 12 in a display box.




3-1/4" wide scraper with built-in ice breakers. 21" plastic handle has hand grip. Polypropylene 2" bristle snow brush.



Tough molded plastic ice scraper. Plastic bristle snow brush on 24" wood handle. 24 in display cart on.




5-1/4" head holds plastic scraper and squeegee. 24" hardwood handle holds plastic bristle brush. 24 in display carton.



20" hardwood handle. Nylon mesh covered synthetic sponge scrubber. Rubber squeegee with steel head.



15-1/2" handle with replaceable 8" head. Nylon mesh covered synthetic sponge scrubber. Pliable neoprene squeegee. Head threads into high impact handle.



20" handle with replaceable 8" head. Nylon mesh covered synthetic sponge scrubber. Pliable neoprene squeegee. Head threads into high impact handle.




Handle extends to 48". For hard-to-reach places: vans, SUVs & trucks. Squeegee head is 10".

Sales Tip

Stock up on these great seasonal impulse items. **9-289**, **9-309** and **9-310** come in handy display boxes for easy merchandising and quick set up.

Combine assortments to create an efficient merchandising solution

SHOP SUPPLIES

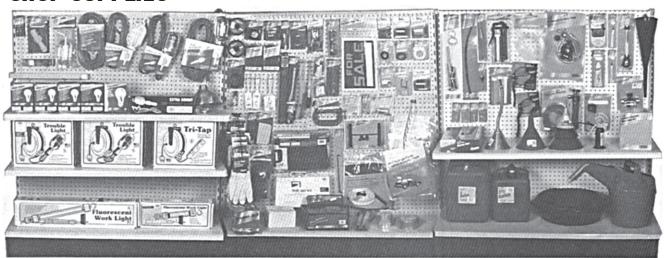

Shop Lighting

Shop Tools & Maintenance

Oil, Lube & Fluid

ACCESSORIES



Car Wash

Interior & Exterior Accessories

Merchandising Solutions from



- **Consolidate** the fastest moving shop supplies and accessories into compact yet complete assortments.
- Suggested merchandising displays provide flexibility and greater sales potential. **Customize** the product mix to reflect your customer base.

How Easy Is It?

- **Choose** from the many assortment options designed to satisfy your installer and walk-in customers alike.
- Recommended product mix listing, plan-o-gram and photograph are provided for each category.
- Using the product listing included, enter the part numbers into your inventory system.
- Order the product and blank reorder cards from your WD.
- Use provided plan-o-gram for quick set up of your sales floor.

Air Hardware & Tire Repair

Cover walk-in demand while providing key shop consumables


- Manage your merchandising space efficiently by combining air hose hardware and tire repair products in one compact assortment
- Offer the top selling products from both categories





Display Specifications

Tire Repair Merchandising Display			
Height 48"			
Width 48"			
SKU Count 80			

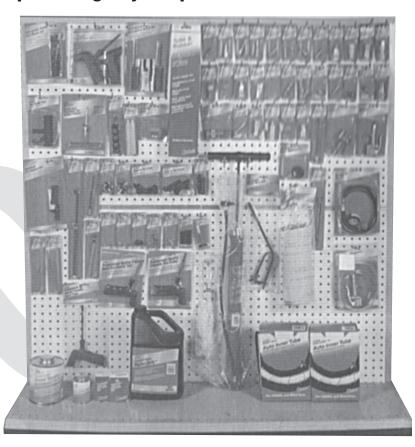


Product Selection

Part #	Description	Qty.
1093790SET	Blank Reorder Card Set (Qty. 45)	2
9-1005-4	Tr 416 Clamp-In Valves	✓ ✓ ✓
9-1065	Tire Swab	✓
9-1070	Deluxe Tire Pump	✓
9-2588	Open-Eye T-Handle Tool	✓
9-2589	T-Handle Probe Knurled	✓
9-2594	Spiral T-Handle Probe	✓
9-3262	Straight-On Dual Chuck	✓
9-3304	Tire Tube M/Mr X 14/15	√ √ √
9-3305	Tire Tube G/Gr/K/Kr X 16	
9-599	Radial Tire Repair Kit	✓✓✓
9-601	Tire Repair Kit Boxed	✓
9-631	Tire Lubricant 26 oz	✓
9-632	Tire Cement 1/2 Pt	✓
9-639	Emergency Repair Kit	✓
9-648	Patch Kit Medium	✓
9-655	Bead Sealer 1 Qt	✓
9-661	All Purpose Cement 1 Pt	✓
9-675	4-N-1 Tire Repair Tool	✓ ✓ ✓
9-677	H.D. T-Handle Tool	
9-678	Roller Stitcher	✓
9-681	Tire Crayons 2/Pk	✓

Part #	Description	Qty.
9-698	Repair Kit 6 Strips/Tool	2
9-724	Tire Patches 1-5/8"	✓
9-725	Tire Patches 2-1/4"	✓
9-850	1/4" Aro Nipple 1/4" M	✓ ✓ ✓
9-854	1/4" Milton Nipple 1/4" M	✓
9-855	1/4" Milton Nipple 1/4" F	✓
9-859	1/4" Truflate Nipple 1/4" M	✓
9-865	1/4" Aro Coupler 1/4" F	✓
9-866	1/4" Lincoln Coupler 1/4" F	✓
9-869	1/4" Milton Coupler 1/4" M	✓
9-870	1/4" Milton Coupler 1/4" F	✓
9-871	1/4" Milton Coupler 1/4" F	✓
9-882	Snap-On Chuck w/Clip	✓
9-889	Single Ball Foot Chuck	✓
9-890	Dual Foot Chuck	✓
9-894	Rubber Tip Blowgun	✓
9-898	Tire Service Gauge	✓
9-902	Pencil Tire Gauge	>>>>>>>>
9-908	Inflator Gauge w/Chuck	✓
9-912	Air Chuck Blowgun	✓
9-918	Thread Depth Guide	✓
9-956	1/4" ID Nylon Air Hose 25'	✓

Air Hardware & Tire Repair (continued)

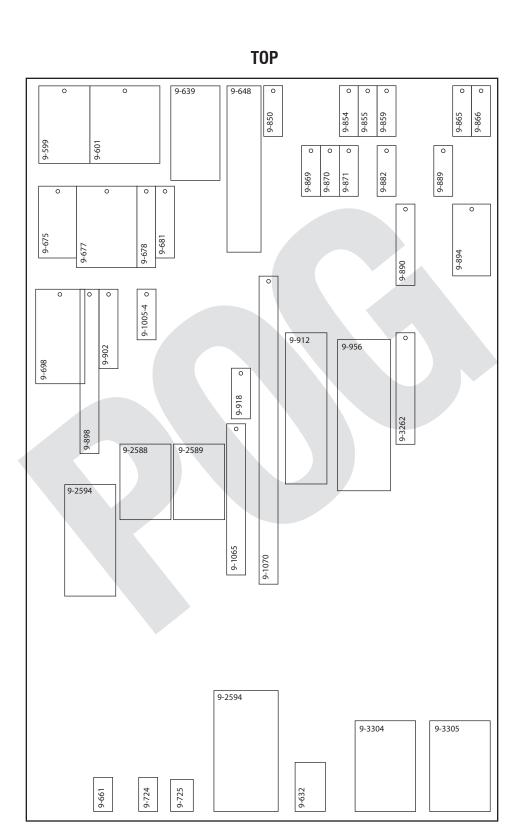


BOTTOM

Antennas

Provide customers with top selling antennas covering 93% of the sales mix


- Includes OE style & universal antennas
- Waterfall racks make for a compact, easyto-merchandise display

To build an Antenna display, order suggested open stock product from your WD

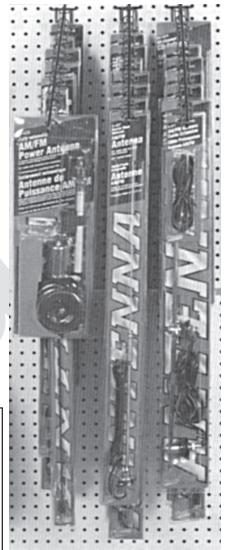

Product Selection

		_
Part #	Description	Qty.
1093790SET	Blank Reorder Card Set (Qty. 45)	1
1099449	High Perf Clamp-In Valve	1
9-1505	Tr 416 Clamp-In Valves	✓
9-1515	Tr 413 Snap-In Valves	✓
9-1518	Tr 418 Snap-In Valves	✓
9-2249	Valve Core - Short	✓
9-405	Chrome Valve Caps	✓
9-407	Plastic Dome Valve Caps	✓
9-425	Metal Valve Ext 1-1/4"	>>>>>>>
9-449	4-N-1 Valve Repair Tool	✓
9-450	Nylon Valve Extension 1-1/2"	✓
9-451	Tire Swab	✓
9-454	Deluxe Tire Pump	✓
9-456	Air Tank Make-Up Kit	✓
9-457	Core Extractor Tool	✓
9-458	Open-Eye T-Handle Tool	✓
9-459	T-Handle Probe Knurled	✓
9-463	Spiral T-Handle Probe	✓
9-464	Lge/Std Bore Core Removal Tool	✓
9-465	Barb Fitting Splicer 3/8" ID	✓
9-468	Replace Air Tank Gauge	* * * * * * *
9-471	Universal T/M/A 1/4" M	✓
9-478	Universal T/M/A 1/4" F	✓
95-1076	1/4" Aro Coupler 1/4"	✓



Display Specifications

Biopidy opositionions					
Antenna Merchandising Display					
Height 48"					
Width 24"					
SKU Count 23					

M. Replace Then Masts for Of Power Antennas

N. Replace Then Masts for Of Power Antenna.

Stock Only Fast problem ast, not the entire antenna.

Great problem mast, not the entire antenna.

Brooms & Squeegees

Contains squeegees and brooms to meet the needs of your "shop owner" customers

 Help keep your customers' shops clean with this wall assortment of brooms, brushes, squeegees, mops & handles




 To build a Broom & Squeegee display, order suggested open stock product from your WD




Part #	Description	Qty.
1093790	Blank Reorder Card Set (order 1)	√
9-304	24" Black Tampico Floor Brush	V
9-316	24" Driveway Brush	✓ ✓
9-362	String Mop Cord HD 24oz	✓
95-1202	Corn Fiber Broom	✓
95-1204	Mop Handle 4'	✓
95-1207	60" Broom Handle	✓
95-1208	36" Floor Squeegee w/Blade	✓
95-1216	5' Metal Tip Broom Handle	✓



Dispidy Openincations				
Brooms & Squeegees Merch. Display				
Height 72"				
Width	38"			
SKU Count 8				

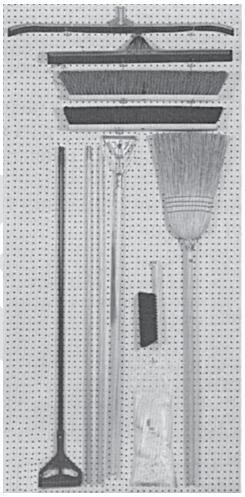

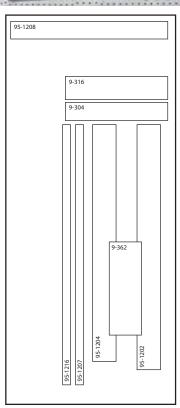

Car Wash

Compact display promotes upgrade and add-on sales.

- Features everything needed to cover the basics plus a light selection of detailing needs
- Assortment represents 76% of sales mix



 To build a Car Wash display, order suggested open stock product from your WD


Display Specifications

Clean & Polish Merchandising Display			
Height 48"			
Width 48"			
SKU Count 29			



Product Selection

	3010011011	_
Part #	Description	Qty.
1093790SET	Blank Reorder Card Set (Qty. 45)	1
9-102	5' Natural Chamois	✓
9-103	2.5' Natural Chamois	✓
9-111	Cleans & Dry 2-1/2"	✓
9-118	Wash Mitt 8" x 11"	✓
9-120	Chenille Wash Mitt 6" x 10"	* * * * * * * * * * * * * * * * * * * *
9-125	Bone Sponge	✓
9-1250	Pistol Grip Hose Nozzle	✓
9-128	Cellulose Sponge	✓
9-130	Cellulose Sponge	✓
9-131	Polishing Pad	✓
9-138	Bonnet 8" Wool	✓
9-157	Car Wash Brush 20" Length	✓
9-159	5" Applicator Pad	✓
9-164	White Tampico Brush	✓
9-176	Nylon Tire Clean Brush	* * * * * * * * * * * * * * * * * * * *
9-182	Brass Tire Clean Brush	✓
9-1840	Hose Coupler Male	
9-1841	Hose Coupler Female	✓
9-1844	Hose Mender	✓
9-193	Upholstery Brush	✓
9-211	Cheescloth	✓
9-233	Shop Towels 25/Pk	✓
9-257	Hardwood Truck Wash Brush	✓
9-269	Terry Towels 4/Pk	✓
9-296	Trigger Spray Bottle 22oz	* * * * * * * * *
9-313	20" Squeegee/Scrubber	✓
9-315	15-1/2" Squeegee/Scrubber	✓
9-350	Whisk Broom	✓
95-1090	Wash Bucket Kit	✓
		ı

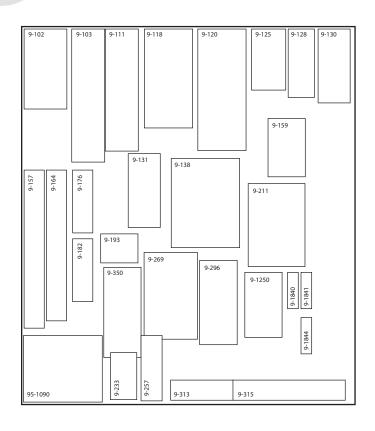

Gauges

Broad selection of gauges to support DIY, performance and towing needs.

- 24 popular SKUs of mechanical and electrical gauges and installation accessories
- Choose from chrome or black, narrow or wide sweep gauges with black faces, white crisp markings and red indicator
- Assortment mix represents 80% of sales mix





Product Selection

Part #	Description	Qty.	
1093790SET	Blank Reorder Card Set (Qty. 45)		
7-103	Ammeter	✓	
7-109	Water Temp Gauge	✓	
7-111	Water Temp Gauge	✓	
7-116	Triple Gauge Kit	✓	
7-118	Tachometer	✓	
7-123	Water Gauge	✓	
7-132	Water Temp Gauge	✓	
7-133	Oil Gauge	✓	
7-146	Oil Pressure Gauge	✓	
7-147	Gauge Install Kit	✓	
7-153	Oil Gauge Kit		
7-155	Water Temp Gauge		
7-156	Dual Gauge Kit	✓	
7-170	Hour Meter	✓	
7-171	Volt Meter	✓	
7-195	Elec Water Gauge	✓	
7-196	Elec Fuel Gauge	✓	
7-199	Fuel Sending Kit	✓	
7-212	Gauge Panel	* * * * * * * * * * * * * * * * * * *	
7-218	Gauge Panel	✓	
7-902	Gauge Kit	✓	

Dispidy openiicalions					
Gauges Merchandising Display					
Height 43"					
Width 24"					
SKU Count 21					

7-103	7-109 7	7-111	7-116	
╙				
o 7-118	o 7-123	7-	o 132	o 7-133
		J L		
o 7-146	o 7-153	o 7-155	7-156	0
o 7-170	o 7-171	o 7-195	o 7-196	1
o 7-147	o 7-212	o 7-218	o 7-902	1
/-14/	7-212	7-210	7-902	
			l	
	7-199	0		
	, 133			

Gloves

Offers 4 of the most popular glove styles for shop, home, garage and farm use


- Merchandise on waterfall peg to generate impulse sales
 - To build a Gloves display, order suggested open stock product from your WD

Product Selection

Part #	Description	Qty.
1093790	Blank Reorder Card Set (order 1)	1
9-963	Jersey Work Gloves	\ \
9-966	Unlined Drivers Gloves	/
9-968	Leather Safety Gloves	V
9-971	Vinyl Coated Gloves	1

Display Specifications

Gloves Merchandising Display		
Height 21"		
Width	6"	
SKU Count 4		





Horns


Basic horn coverage plus back-up alarms for truck & fleet customers

- Single and dual terminal hookups included with each horn
 - To build a Horns display, order suggested open stock product from your WD

Product Selection

	OUIOUII	
Part #	Description	Qty.
1093790	Blank Reorder Card Set (order 1)	1
9-1781	Horn "Disc" Hi 430Hz	✓
9-1782	Horn "Disc" Low 335Hz	√
9-1783	Blaster Horn Hi	✓
9-1784	Blaster Horn Low	✓
9-1793	OE Replacement Horn Hi 450Hz	✓
9-1794	OE Replacement Horn Low 360Hz	✓
9-2950	Backup Alarm 87Db	✓
9-2951	Backup Alarm 107Db	✓

Diopidy opcomodi	biopiay opcomoduono		
Gloves Merchandising Display			
Height 32"			
Width	12"		
SKU Count 8			






Interior & Exterior Accessories

Compact assortment gives you the essentials required to support your DIY customer needs

• Stock your accessories section with only the fastest moving SKUs

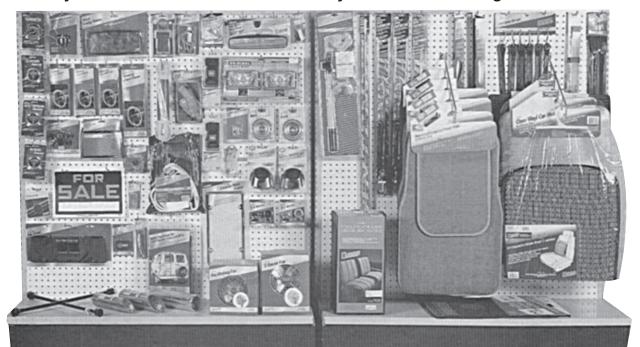

 To build an Interior & Exterior Accessories display, order suggested open stock product from your WD **Display Specifications**

8' Accessories Merchandising Display		
Height 48"		
Width	96"	
SKU Count	54	

D	roc	luct	20	lection	ì
	ıw		or	166.11011	ı

Part #	Description	Qty.
1093790SET	Blank Reorder Card Set (Qty. 45)	2
7-118	Tachometer	✓
7-153	Oil Gauge Kit	✓
7-155	Water Temp Gauge	✓
7-171	Volt Meter	✓
7-257	Rubber Tie-Down, 21"	✓
7-259	Polypropylene Rope, 50'	✓
7-303	Chrome Expansion Hook	✓
7-307	Tow Strap 15' Poly Web	✓
7-314	License Plate Frame, Metal	✓
7-785	Splash Guards Flex Midsize	✓
7-792	Splash Guards Rubber Truck	✓
7-812	Door Edge Black	✓
7-813	Door Edge Chrome	✓
7-822	Tie-Down, 20"	✓
7-824	Seat Belt, 90"	✓
7-837	Blind Spot Mirror, Convex 2"	✓
7-840	Steering Wheel Cover, Black	✓


Product Selection

Part #	Description	Qty.
7-846	Shift Knob Black	✓
7-847	Steering Wheel Cover, Truck	✓
7-848	Registration Holder	✓
7-867	Rearview Mirror, 10"	✓
7-869	Ratchet Tie-Down Strap	✓
7-870	Seat Cushion H/D	✓
7-902	Gauge Kit	✓
7-929	74" Seat belt	✓
7-941	RV/Truck Fan/Defrost	✓
7-942	RV/Truck Fan 12 Volt	✓
7-966	Exhaust Extension 2-1/8" OD	✓
7-969	Exhaust Extension 2-5/8" OD	✓
7-970	Exhaust Extension 2-5/8" OD	✓
7-972	Clothes Hanger Bar	✓
9-1074	Auto Skeleton Key	✓
9-1251	Magnetic Key "Locker"	✓
9-1668	Lug Wrench, 20"	✓
9-1684	Steering Wheel Lock	✓

Product Selection

Part #	Description	Qty.
9-1709	Spare Tire Cover Black	✓
9-1758	Truck Seat Cover Full	✓
9-1781	Horn "Disc" Hi 430Hz	✓
9-1782	Horn "Disc" Low 335Hz	✓
9-1793	OE Replacement Horn Hi	✓
9-1794	OE Replacement Horn Low	✓
9-1858	For Sale Sign	✓
9-1912	Hook-N-Loop Fasteners	✓
9-2669	Twin Truck Mats Black	✓
9-2734	Carpet Mat Beige/Tan	✓
9-2735	Carpet Mat Grey	✓
9-2737	Carpet Mat Black	✓
9-2975	Black Deer Whistle	✓
9-2976	Chrome Deer Whistle	✓
9-405	OE Replacement Mast Bright	✓
9-449	Antenna, Rubber	✓
9-450	Antenna, Top Mount	✓
9-458	Antenna, Ball Base	✓
9-459	Antenna Booster Coil	✓

Interior & Exterior Accessories (continued)

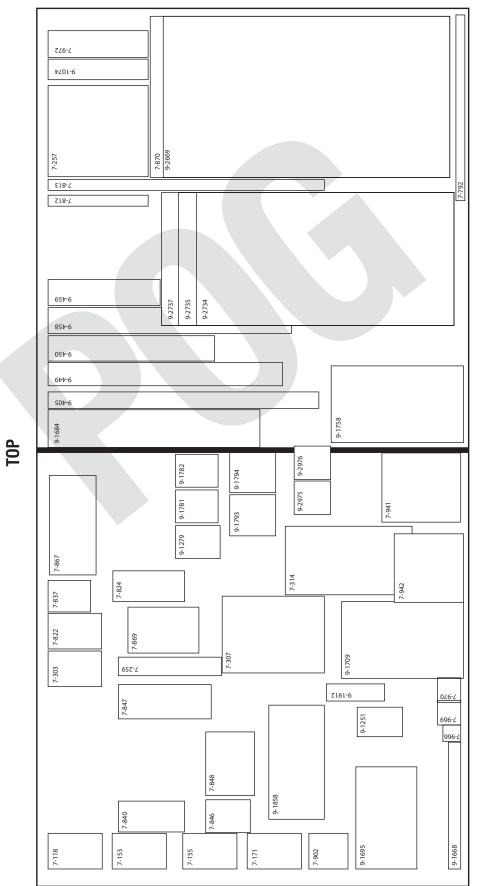

BOTTOM


Oil, Lube & Fluid

One assortment covers DIY needs plus demand from installers


- Combined assortment of funnels, grease guns, gas cans and drain pans
- Compact assortment covers 70% of sales mix
- For greater SHOP SUPPLY coverage, merchandise with 4' Shop Lighting and 4' Shop Tools and Maintenance assortments



 To build an Oil, Lube & Fluid display, order suggested open stock product from your WD

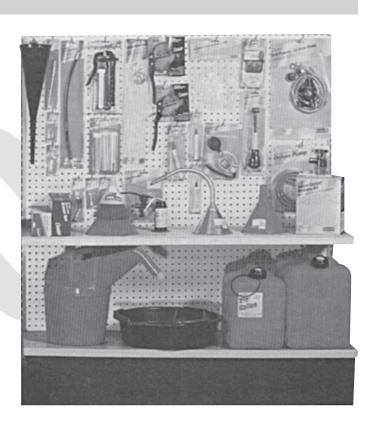

Product Selection Description Qty. 2 1093790SET Blank Reorder Card Set (Qty. 45) 9-1253 Sinhon 9-1300 Antifreeze Tester 9-1316 Oil Drain Pan, Polypropylene 9-1555 3oz Grease Cartridge 9-1635 Oil Drain Pump Deluxe Coolant Recovery Kit ✓ 9-1663 9-1748 5/8" Flushing Kit 9-1795 12 Position Swivel Adapter 9-1796 Needle Tip Adapter √ √ 9-1810 White Lithium Grease 9-1812 Cable Lubricant 9-1813 Graphite Lubricant 9-1830 Deluxe Antifreeze Tester 9-1834 Professional Antifreeze Tester √ √ 9-1877 Grease Gun Coupler 9-2749 3-in-1 Pump · ~ 9-722 3-Piece Funnel Set 9-735 Super Funnel 9-757 HD Pistol Oiler 9-762 Suction Gun, 1 Pint 9-763 HD Grease Gun ✓ 9-765 Grease Fitting Coupler 9-766 Grease Injection Needle 9-773 18" Grease Gun Hose 9-783 Mini Grease Gun, One-Hand 9-785 Flexible Filler, Galvanized 9-807 Plastic Radiator Filler 9-811 Fast Flow Funnel 9-910 Brake Fluid Pump

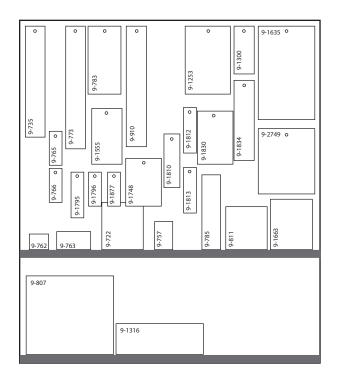

Oil, Lube & Fluid Merchandising Display		
Height 48"		
Width	48"	
SKU Count 29		

Shop Lighting

Encourage upgrade sales by displaying fluorescent and retracting shop lights

- Assortment mix includes light bulbs, shop lights and accessories
- For greater SHOP SUPPLY coverage, merchandise with 4' Oil, Lub and Fluid and 4' Shop Tools and Maintenance assortments




 To build a Shop Lighting display, order suggested open stock product from your WD



Product Selection

····	OUIOUII	
Part #	Description	Qty.
1093790SET	Blank Reorder Card Set (Qty. 45)	1
9-1207	Mini Fluorescent Light, 15'	✓
9-1208	Fluorescent Light, 25'	✓
9-1209	Reel Droplight, 18/3 30'	✓ /
9-1212	Reflector Light	✓/
9-1229	Reel Droplight Handle	✓
9-1231	Metal Bulb Cage	✓
9-1294	Reel Droplight, 18/3 50'	✓
9-357	75-Watt Rough Bulb	✓ \
9-360	100-Watt Rough Bulb	~
9-361	Fluorescent Bulb, 15-Watt	✓
9-365	Mini Fluorescent Bulb, 13-Watt	✓
9-366	75 Watt Plastic Bulb	✓
9-367	100 Watt Plastic Bulb	✓
9-369	12-Volt, 50 Watt Bulb	✓

Dispiay opecifications		
Shop Lighting Merchandising Display		
Height 48"		
Width	48"	
SKU Count 14		

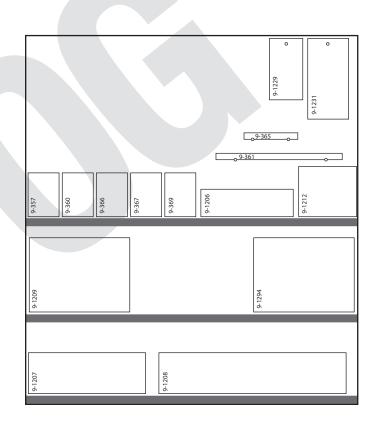


Shop Tools & Maintenance

The best selling shop tools and maintenance products conveniently organized in one compact area

- Assortment includes tape, weatherstripping, mechanics wire, gloves and miscellaneous tools
- For greater SHOP SUPPLY coverage, merchandise with 4' Shop Lighting and 4' Oil, Grease and Fluid assortments



 To build a Shop Lighting display, order suggested open stock product from your WD

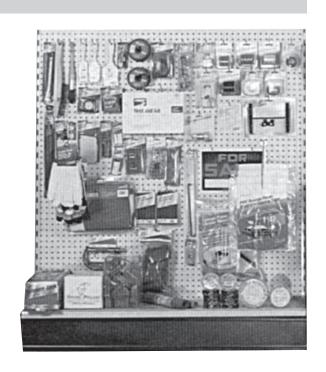

Product Selection

Part #	Description	Qty.
1093790SET	Blank Reorder Card Set (Qty. 45)	2
111702	Battery Hold Down	
135141	Fiber Gasketing 1/32"	✓
135144	Asbestos-Free Gasketing	✓
137001	Top Post Battery	✓
7-759	Safety Glasses	✓
9-1086	Standard Padlock	✓
9-1087	Long Shackle Padlock	✓
9-1324	Rosin Solder 72	✓
9-1366	12" Flat Mill File	✓
9-1451	Red Reflective Tape	✓
9-1452	Red Lens Repair Tape	✓
9-1453	Amber Lens Repair Tape	✓
9-1454	Duct Tape, 2" x 135'	✓
9-1459	Pickup Truck Cap Tape	✓
9-1462	Teflon Joint Tape	✓
9-1464	Radiator/Heater Hose Bandage	✓
9-1471	Top Post Battery Protectors	✓
9-1491	Weatherstrip 3/4" x 5/16"	✓
9-1492	Weatherstrip 3/4" x 7/16"	✓
9-1493	Weatherstrip 1" x 5/16"	✓
9-1494	Weatherstrip 1" x 7/16"	✓
9-1495	Weatherstrip 1" x 9/16"	✓
9-1648	Double Face Foam Tape	✓
9-1650	Alum. Foil Tape 3" x 30'	✓
9-1651	Molding/Trim Tape	✓
9-1660	Body Filler/Spreader	✓
9-1673	Scissor Jack	✓
9-1698	Retracting Scraper	✓
9-1699	Razor Blades, Steel	2
9-1738	Fender Cover	✓


Product Selection

Part #	Description	Qty.
9-175	Pumice Soap, 25/Display	✓
9-1775	Metal Tank Repair Kit	✓
9-1787	Swivel Handle Scraper	✓
9-1788	Utility Knife	✓
9-1789	Utility Knife Blades	✓
9-1858	For Sale Sign	\frac{\frac}}}}}}}}{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\frac}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}
9-187	Brush Scratch	✓
9-190	Brush Scratch	✓
9-1937	4" C-Clamp	✓
9-195	Brush Parts Clean	
9-1985	Steel Wool (Fine)	✓
9-218	Brush Coarse Wire End	✓
9-223	1" Paint Brush	✓
9-227	2" Paint Brush	✓
9-231	3" Paint Brush	✓
9-279	Electrical Tape	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
9-409	Creeper Wheels	✓
9-431	Battery Terminal Tool	✓
9-741	75 Watt Plastic Bulb	✓
9-742	Mechanics Wire, 16 Gauge	✓
9-743	Mechanics Wire, 18 Gauge Coil	✓
9-931	12' Steel Measure Tape	✓
9-963	Jersey Work Gloves	✓
9-966	Unlined Drivers Gloves	✓
9-968	Leather Safety Gloves	✓
9-971	Vinyl Coated Gloves	✓.
9-982	Large First Aid Kit	✓

Biopia, opcomounone				
Shop Tools Merchandising Display				
Height	48"			
Width	48"			
SKU Count	57			

Shop Tools & Maintenance (continued)

TOP

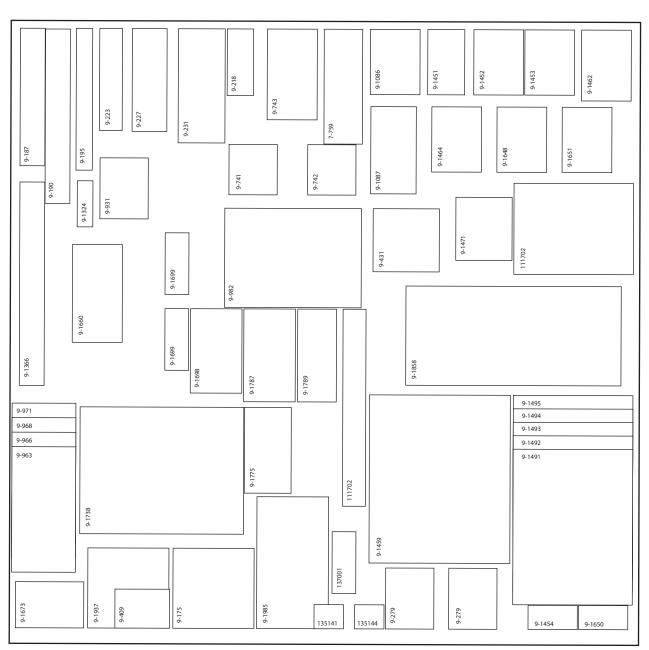

BOTTOM

Shop Towels

Customers can handle roll of towels – driving impulse sales

- Counter display box contains 12 rolled and banded 3-packs of shop towels
- Industry standard red shop towels are 13" x 15"
- Machine washable and hemmed



Display Specifications

Shop Towels Merchandising Display		
Height	12"	
Width	12"	
SKU Count	12	

Promotional Merchandisers

Other items available in Impulse Buy Merchandisers

9-289 - Ice Scraper - 12/box

9-309 - Snowbrush/Scraper - 24/box

9-310 - Snowbrush/Scraper/Squeegee - 24/box

Promotional Merchandisers



512910 Nail Brush

- General purpose hand cleaning brush
- Related sales to hand cleaners
- Quantity 35 pcs



512902 Teflon® Tape

- 1/2" wide x 600' long
- Seals threaded fittings in air and fluid connections
- Quantity 40 pcs



9-175 Pumice Soap

- Volcanic pumice scrubs dirt, oil, grease and grime from hands
- Coconut oil helps preserve natural skin oils and prevent dying
- Quantity 25 pcs



512907 Brass Wire Brush

- Use for general cleaning
- Brass bristles won't scratch
- Black plastic handle with contoured grip
- Quantity 25 pcs



95-9931 Tape Measure

- 1/2" x 12' measuring tape
- Graduated in 1/16" (first foot in 1/32")
- High impact molded case with thumb lock and steel belt clip
- Quantity 30 pcs

METAL WORKS

A Complete Automotive Metal Working Program



SAFETY PRODUCTS

- Helmets
- Goggles & Safety Glasses
- Ear Protection



Brushes

- Wire & Brass Utility Brushes
- Shank and Power Brushes



CALLING

- Welding & Cutting Tips
- Nozzles for Harris, Smith & Victor Equipment Styles
- Torch Kits, Gauges, Lighters & other cutting tools




ABRASIVES

- Cut-Off Wheels
- Grinding Wheels
- Mounted Grinding Points
- Sanding Discs & Materials



SOLDERING PRODUCTS

- · Rosin And Acid Core Solder
- · Lead Free Solder
- · Solid Wire and Silver Solder
- Soldering Accessories



Welding Products

- Welding & Brazing Rod
- MIG Wire & Accessories
- Shop Tools, Cable Lugs, Cables and Other Welding Accessories

PRODUCT SAFETY INFORMATION

WELDING SAFETY PROCEDURES:

Equipment Inspection:

Use the disconnect switch at the breaker box to turn off input power prior to working on equipment. Make sure all equipment is installed in accordance with local and national electrical codes. Ground all equipment according to manufacturer's recommendations. Be sure cables make good electrical connections as close to the work piece as possible. Do not dip electrode into water for cooling.

Personal Protection:

Wear dry leather gloves, a protective jacket, and helmet with the proper shaded lens for maximum protection against shocks, burns, and arc rays. Use a lens and filter which conforms to ANSI Z87.1 standards to protect your eyes from arc rays and sparks. Avoid breathing fumes and gases when welding. Do not weld near vapors from spraying and cleaning operations to avoid fires and explosions. Use adequate ventilation in all work areas to prevent injury. Remove all fire hazards from a welding area or cover them with a fire retardant material. Use suitable work clothes made of flame-resistant materials for protection. Protect other personnel in work area by using a non-flammable screening and warn them not to watch the arc or hot spatter.

GRINDING, CUTTING AND POWER BRUSHING SAFETY PROCEDURES:

Power Brushes and Grinding Tools are safe and dependable tools that are designed, manufactured, inspected and tested by experts to assure consistent high quality. We recommend that all tools be prudently operated. All operators of power brushes should be familiar with ANSI B165.1 and ANSI B 165.2 -1988 "Safety Requirements - Staple Set Power Brushes."

Copies of these standards are available at public libraries and from the American National Standards Institute, Inc. (ANSI), 1430 Broadway, New York, NY 10018; or the American Brush Manufacturer's Association, 1900 Arch Street, Philadelphia, PA 19103.

Below, we have summarized some of the operator care and use safety requirements. It is mandatory that you read and observe all of these safety requirements.

1. Inspection:

Upon receipt, make sure brushes and wheels were not damaged during shipment. If damaged, don't use them.

2. Storage and Handling:

Repackage and store brushes, cutting and grinding wheels in their original boxes or equivalent. Do not expose to high humidity, heat, acids, fumes, water, or other liquids which might adversely affect them. Do not allow brush fill or components to become distorted, as this may cause an

unbalanced condition when run. Do not allow foreign matter to accumulate on or become lodged in the tool face. Do not use a wheel or brush that has been dropped.

3. Machine Condition:

Maintain the machine in a safe operating condition. Provide adequate power to maintain spindle speed and adequate exhaust for the application. Use a work rest. Adjust the work rest so that no more than a 1/8" opening is between the rest and the tool. Adjust the work rest only when the tool is not in motion. Do not use a wheel or brush larger than the machine is designed to accommodate. If a spindle nut is used to secure the wheel or brush, the direction of the thread should be in such relation to the direction of rotation that the nut will tend to tighten as the spindle revolves. If flanges are used, they should be identical in size and radial bearing surface to avoid cross-bending pressure. Threaded spindles should be long enough to allow full nut mounting.

4. Mounting Brushes, Cutting and Grinding Wheels:

Before mounting, inspect wheels and brushes for damage, rust, oxidation, or other types of deterioration. If not in good condition, do not use it.

Arbor hole and spindle diameter should be the same. Wheel or brush should fit freely on the spindle. If equipped with an adaptive bushing, the wheel or brush - not the bushing - should be gripped on the machine spindle. Flanges, if used, should be compressed with sufficient force to anchor the wheel or brush, but should not damage the fill material, compress the thickness of the wheel or brush through the hub, or otherwise distort the wheel or tool.

Shank type tools: The shank should be inserted into the chuck or collet as far as possible, with the minimum possible overhang of the tool, and tightened securely.

5. Speed:

Do not exceed the MSFS (MAXIMUM SAFE FREE SPEED) for which the wheel or brush is rated. Maximum Safe Free Speed is the maximum R.P.M. at which the brush should be run with no work applied (spinning free) and is NOT the recommended operating speed. The recommended operating speed should be determined by the application, but should never exceed the MSFS for which the wheel or brush is rated. Users must check spindle speed frequently and maintain records of these checks.

6. Protective Eyewear, Clothing and Equipment:

Protective eye equipment must be used by all operators. Full face protection for the operator and other protective equipment and clothing must be required by the employer if such equipment can prevent possible injuries. Other personnel in the work area must wear eye protection and other safety equipment to prevent injury. An enclosure should be used to isolate any hazardous operation from the operator and other personnel.

(continued on next page)

7. Machine Guards:

Keep all machine guards in place. Use grinding or cutting wheels and rotating brushes only on machines with safety guards.

8. Starting the Tool:

Before starting the job, inspect the machine to be sure it is ready to use and that the wheel or brush is fastened securely. Tools must be run at operating speed with all required safety guards in place or in a protective enclosure for at least one minute before applying work. During this time, no one should stand in front of or in line with the wheel or brush.

9. Supervision:

Persons competent in grinding, cutting and brush technology should be assigned to the mounting, care, and inspection of tools and machinery. It is the responsibility of the employer to fully inform all operating personnel and others in the area about all of the hazards relating to power tool use and to train them in the proper use of grinding and cutting wheels, brushes, safety rules, correct speeds, the need for eye and face protection, as well as other protective equipment and safe procedures.

WARNING:

In normal grinding, cutting and power brushing operations, the material being removed, such as burrs, scale, dirt, weld slag, or other residue, will fly off the tool with considerable force along with wheel grit and brush filaments, which break off due to fatigue.

Never use the side of a wheel or brush unless it was designed for that specific purpose.

Never jam a workpiece into the wheel or brush.

The potential of serious injury exists for both the power tool operator and others in the work area (possibly 50 feet or more from the tool). To protect against this hazard, operators and others in the area must wear SAFETY GOGGLES or FULL FACE SHIELDS OVER SAFETY GLASSES WITH SIDE SHIELDS, along with PROTECTIVE CLOTHING.

You must follow all operator and safety instructions, as well as common safety practices which will reduce the likelihood or severity of physical injury.

BRUSHING PROBLEMS: DO NOT ALLOW UNSAFE CONDITIONS TO CONTINUE.

Occasionally, due to worn bearings, a bent spindle, an unusual application, operator abuse or inappropriate use, a brush or wheel may fail. A wheel or brush which is not received in acceptable condition for trouble-free operation may also fail. Do not use or continue to use a failed wheel or brush or one which is functioning improperly (i.e., throwing filaments, nicked, warped, out-of-balance, etc.), as this increases the possibility for further failure and hazard of injury. The cause of the failure should be evaluated and corrected.


Self-Sharpening: When using wire wheel brushes, periodically reverse the direction of rotation to take advantage of the self-sharpening action that will result. This may be accomplished by removing the brush from the spindle and turning it side for side, and remounting it securely. See Fig. 2.



ABMA

RESULT IN INJURY.

SAFETY COMMITTEE
INDUSTRIAL BRUSH DIVISION
AMERICAN BRUSH MANUFACTURERS ASSOCIATION



REMOVE TURN

REMOUNT

SIDE A

FIG. 2

Cut-Off Wheels

- Reinforced aluminum oxide wheels cut steel for exhaust, body and general metal work. Not for fiberglass or materials other than steel.
- CAUTION: Always wear safety goggles and full face protection
- · Never exceed maximum RPM



Diameter	Thickness	Arbor Size	Max. RPM	MetalWork! Part # (Qty.)
3" Diameter	1/32"	3/8"	19,000	08521 (5)
3" Diameter	1/32"	3/8"	23,000	08501 (5)
3" Diameter	1/16"	1/4"	23,000	08505 (5)
3" Diameter	1/16"	3/8"	23,000	08509 (5)
3" Diameter	1/8"	1/4"	23,000	08513 (5)
3" Diameter	1/8"	3/8"	23,000	08517 (5)
4" Diameter	1/16"	1/4"	19,000	08541 (5)
4" Diameter	1/16"	3/8"	19,000	08525 (5)
4" Diameter	1/16"	5/8"	19,000	08533 (5)
4" Diameter	1/8"	3/8"	19,000	08529 (5)
4-1/2" Diameter	1/16"	7/8"	13,300	08547 (5)
7" Diameter	1/8"	5/8"	8,700	08550 (1)
12" Diameter	1/8"	1"	5,100	08556 (1)
14" Diameter	1/8"	1"	4,400	08559 (1)

Grinding & Cut-Off Accessories



Removes clogged material and restores original grinding surface. For wheels up to 10" diameter and 2" width. Made of cast iron. 10-1/2" long.



For 1/4" & 3/8" arbors with a 1/4" shank. Ideal for mounting cut-off wheels.

Grinding Wheels - Aluminum

 Soft and fast cutting wheel for aluminum, non-ferrous metals and greasy materials.

Size	Grit	Arbor Hole	Max. RPM	MetalWork! Part # (Qty.)
7" x 1/4"	24	5/8" - 11	8,500	08670 (1)





Grinding Wheels - Flexible/Hubless

 Double reinforced wheel conforms to work shapes and becomes more pliable as it is used. Use with angle head grinders with 5/8" arbor.

Size	Grit	Max. RPM	MetalWork! Part # (Qty.)
4" x 1/8"	60	13,500	08676 (1)
4" x 1/8"	36	13,500	08675 (1)
4-1/2" x 1/8"	60	13,300	08678 (1)
4-1/2" x 1/8"	36	13,300	08677 (1)



Grinding Wheels - Type 1


 For stationary bench grinders. General purpose sharpening and grinding of mild steel. Vitrified bond, aluminum oxide. 1" arbor hole. Comes complete with reducing bushing.

Size	Grit	Max. RPM	MetalWork! Part # (Qty.)
6" x 3/4"	36	4,100	08690 (1)
6" x 3/4"	60	4,100	08691 (1)



Grinding Wheels - Type 27 - Hub/Hubless

- Fiberglass reinforced, 24 grit aluminum oxide, general purpose wheel designed for use on air or electric powered right angle or vertical shaft grinders.
- Applications include automobile/truck body work and metal fabrication. Available hubless or with threaded hub.



Size	Туре	Arbor Hole	Max. RPM	MetalWork! Part # (Qty.)	Champ Part # (Qty.)
4" x 1/8"	Hubless	5/8"	13,500	08595 (1)	
4" x 1/4"	Hubless	5/8"	13,500	08598 (1)	9-2840 (1)
4-1/2" x 1/8"	Hubless	7/8"	13,300	08601 (1)	
4-1/2" x 1/4"	Hub	5/8" - 11	13,300	08640 (1)	
4-1/2" x 1/4"	Hubless	7/8"	13,300	08605 (1)	9-2842 (1)
5" x 1/4"	Hubless	7/8"	12,200	08607 (1)	
7" x 1/4"	Hub	5/8" - 11	8,500	08643 (1)	9-2844 (1)
7" x 1/4"	Hubless	7/8"	8,500	08609 (1)	
8" x 1/4"	Hub	5/8" - 11	6,500	08646 (1)	
9" x 1/4"	Hub	5/8" - 11	6,500	08649 (1)	

Grinding Wheels - Type 28

 Type 28 wheels are designed to run flat providing faster grinding on flat surfaces and cornering. Excellent for pipeline work. Fiberglass reinforced, aluminum oxide.

Size	Grit	Arbor Hole	Max. RPM	MetalWork! Part # (Qty.)
7" x 1/4"	24	5/8" - 11	8,500	08656 (1)



Mounted Grinding Points


• Aluminum oxide abrasive points on 1/4" shanks. Use to port manifolds, finish metals and ceramics, ream, shape, cut, sharpen, and deburr.



Diameter	Length	Shape	Industry Shape	Max. RPM	MetalWork! Part # (Qty.)
1/4"	3/4"	Cylindrical	A-24	76,500	08720 (1)
1/4"	1-1/16"	Pointed Cylindrical	A-15	72,750	08721 (1)
3/4"	1"	Pear Shaped	A-23	39,370	08725 (1)
3/4"	1-1/8"	Conical	A-5	45,000	08723 (1)
3/4"	1-1/4"	Parabolic Shaped	A-12	48,000	08722 (1)
7/8"	2"	Domed Cylindrical	A-11	19,860	08726 (1)
1"	1/2"	Cylindrical	W-218	38,200	08729 (1)
1"	1"	Cylindrical	A-38	34,500	08730 (1)
1"	1"	Cylindrical	W-220	25,500	08731 (1)
1"	1-1/4"	Conical	A-5	38,200	08724 (1)
1-1/4"	1-1/4"	Conical	A-4	30,560	08727 (1)


Tech Tip


Maximum RPM's apply only when wheels are properly mounted with no more than 1/2" of any mandrel extending from the collet and with the wheel running true.




Rotary Files & Rasps


- · Tough enough for many jobs made from high carbon steel
- Can be used on bronze, aluminum and mild steel as well as plastic and fiberglass
- The rasps are ideal for quick material removal in hard-to-reach places
- 1/4" shank and a maximum speed of 2,500 RPM
- · Listed by type





















Sanding - Emery Cloth

 An assortment of 1" wide rolls of emery cloth for polishing nicks and scratches. Perfect for copper pipe soldering preparation.

	Grit	MetalWork! Part # (Qty.)	
ſ	80	08850 (1)	
1	120	08851 (1)	
1	180	08852 (1)	
1	320	08853 (1)	



Sanding - Flap Wheels

- A full line abrasive system for removal of unwanted materials from hard-toreach areas and surfaces. Perfect for metal refinishers and hobbyists.
- 1/4" shank for use with an electric drill

Size	Grit	MetalWork! Part # (Qty.)
1" Dia. x 1"	60	08825 (1)
1" Dia. x 1"	80	08826 (1)
1" Dia. x 1"	120	08827 (1)
1-1/2" Dia. x 1/2"	60	08828 (1)
1-1/2" Dia. x 1/2"	80	08829 (1)
1-1/2" Dia. x 1/2"	120	08830 (1)
2" Dia. x 1"	60	08832 (1)
2" Dia. x 1"	80	08833 (1)
2" Dia. x 1"	120	08834 (1)
3" Dia. x 1"	60	08836 (1)
3" Dia. x 1"	80	08837 (1)
3" Dia. x 1"	120	08838 (1)



Sanding Accessories



4-1/2" Dia. x 5/8"-11 Thread.



5" Dia. x 5/8"-11 Thread.



7" Dia. x 5/8"-11 Thread.




Use with pressure sensitive discs.

Sanding Discs

- For all your sanding, fine finishing and metal surface preparation needs
 Available in the most popular grits (16 120) and in 3 diameters (4-1/2", 5", 7")
- Aluminum oxide

-		MetalWork!
Size	Grit	Part # (Qty.)
4-1/2" Dia.	16	08773 (3)
4-1/2" Dia.	24	08774 (3)
4-1/2" Dia.	36	08775 (3)
4-1/2" Dia.	50	08776 (3)
4-1/2" Dia.	80	08777 (3)
4-1/2" Dia.	120	08779 (3)
5" Dia.	16	08781 (3)
5" Dia.	24	08782 (3)
5" Dia.	36	08783 (3)
5" Dia.	50	08784 (3)
5" Dia.	80	08785 (3)
5" Dia.	120	08787 (3)
7" Dia.	16	08790 (2)
7" Dia.	24	08791 (2)
7" Dia.	36	08792 (2)
7" Dia.	50	08793 (2)
7" Dia.	80	08794 (2)
7" Dia.	120	08796 (2)

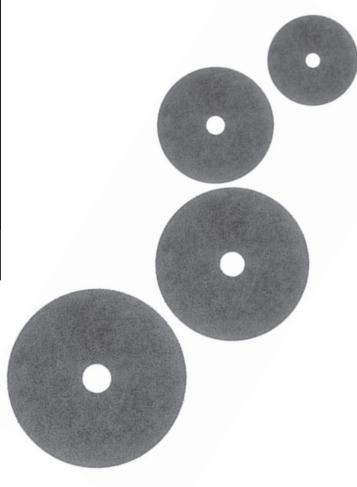

Sales Tip

While sanding, safety goggles are recommended (See pages 82 and 83 for Safety Products)



Brushes - Power Wire - Crimped Cup

- · For cleaning welds, removing paint and rust from metals and general cleaning
- Small diameter, high tensile wire for more flexibility and more scratch points
- Standard and metric arbor sizes, .014" wire, carbon steel

Size	Arbor	Max. RPM	MetalWork! Part # (Qty.)
3" Dia.	5/8"-11"	12,500	09122 (1)
3" Dia.	M10-1.25	12,500	09123 (1)
3" Dia.	M10-1.5	12,500	09121 (1)
5" Dia.	5/8"-11"	6,600	09125 (1)



Brushes - Power Wire - Crimped Wheel

- For finishing and polishing metals or for general purpose cleaning
- Standard and metric arbor sizes, .014" wire, carbon steel
- Wheels with 5/8" to 1/2" arbor are for use on bench grinders and have 5/8" arbor hole with adapter for 1/2" arbors



Size	Arbor	Wire	Max. RPM	MetalWork! Part # (Qty.)	Champ Part # (Qty.)
4" Dia.	1/2"	.008"	4,500	09060 (1)	
4" Dia.	5/8"-11"	.014"	12,500	09100 (1)	
4" Dia.	M10-1.25	.014"	12,500	09101 (1)	
4" Dia.	M10-1.5	.014"	12,500	09102 (1)	
6" Dia.	5/8" - 1/2"	.014"	6,000	09106 (1)	9-215 (1)
8" Dia.	5/8"	.014"	4,500	09107 (1)	



Tech Tip

Bristles may fly out of wire wheels and brushes...protect your eyes and wear safety goggles.

Brushes - Power Wire - Knotted Wheel

- · Power brushes for general purpose cleaning and polishing for use on hard materials.
- Standard or metric arbor sizes, 5/16" width, .014" wire, carbon steel
- Wheels with 5/8" to 1/2" arbor are for use on bench grinders and have 5/8" arbor hole with adapter for 1/2" arbors



Size	Arbor	Max. RPM	MetalWork! Part # (Qty.)	Champ Part # (Qty.)
4" Dia.	5/8"-11"	20,000	09084 (1)	
6" Dia.	5/8" - 1/2"	9,000	09086 (1)	9-216 (1)
6" Dia.	5/8-11"	9,000	09085 (1)	

Tech Tip

Read all Product Safety **Information** before using brushes (See pages 66-67).

Brushes - Power Wire - Knotted Cup

- The perfect brush for cleaning welds, removing paint and rust from metals and general cleaning
- High tensile wire for more flexibility and more scratch points with light pressure use
- · Standard and metric arbor sizes, carbon steel
- Note: 09139 is a double row brush

Size	Arbor	Max. RPM	MetalWork! Part # (Qty.)
3" Dia.	5/8"-11"	12,500	09130 (1)
3" Dia.	M10-1.25	12,500	09133 (1)
3" Dia.	M10-1.5	12,500	09132 (1)
3" Dia.	M14-2.0	12,500	09134 (1)
4" Dia.	5/8"-11"	9,000	09135 (1)
4" Dia.	5/8"-11"	9,000	09139 (1)
6" Dia.	5/8"-11"	6,600	09136 (1)



Right Angle Grinder



Brushes - Power Wire - Stringer Bead Twist

- · Heavy duty wire for aggressive cleaning action
- Standard and metric arbor sizes, 1/8" width, .020" wire, carbon steel

Size	Arbor	Max. RPM	MetalWork! Part # (Qty.)
4" Dia.	5/8"-11"	20,000	09093 (1)
4" Dia.	M10-1.5	20,000	09094 (1)
5" Dia.	5/8"-11"	12,000	09095 (1)



Be certain to check and tighten all discs and wire wheels before using them.



Brushes - Shank

- · For general purpose cleaning including polishing and removing rust
- · Use with electric drill





Circular End Wire Brush				
Size	Max. RPM	Mounting	MetalWork! Part # (Qty.)	
1-1/2" Dia. x 0.020" Wire	15,000	1/4" Shank	09045 (1)	

Crimped End Brush				
Size	Max. RPM	Mounting	MetalWork! Part # (Qty.)	
1" Dia.	20,000	1/4" Shank	09041 (1)	

Brushes - Shank (continued)



The state of the s				
Coarse Wire Cup Brush (.014 Wire)				
Size	Max. RPM	Mounting	MetalWork! Part # (Qty.)	Champ Part # (Qty.)
1-1/2" Dia.	5,000	1/4" Shank	09048 (1)	
2-1/2" Dia.	5,000	1/4" Shank	09049 (1)	9-201 (1)



Fine Wire Cup Brush				
Size	Max. RPM	Mounting	MetalWork! Part # (Qty.)	
2-1/2" Dia. x 0.008" Wire	5,000	1/4" Shank	09050 (1)	




Coarse Wire Wheel Brush				
Size	Max. RPM	Mounting	MetalWork! Part # (Qty.)	
2" Dia.	6,000	1/4" Shank	09053 (1)	
2-1/2" Dia.	6,000	1/4" Shank	09054 (1)	
3" Dia.	4,500	1/4" Shank	09055 (1)	



Fine Wire Wheel Brush				
Size	Max. RPM	Mounting	MetalWork! Part # (Qty.)	Champ Part # (Qty.)
3" Dia.	4,500	1/4" Shank	09056 (1)	9-199(1)








Solid End Wire Brush				
Size	Max. RPM	Mounting	MetalWork! Part # (Qty.)	
3/4" Dia.	20,000	1/4" Shank	09043 (1)	

Sales Tip

Many styles and sizes of Part Cleaning Brushes are available in Champ:


- 9-194 Mixed Tampico Bristles 11-1/4" overall length
- **9-195** Polypropylene Bristles 11-1/2" overall length
- **9-198** Mixed Tampico Bristles 12" overall length

Brushes - Utility



1/2". For application of solder flux to work area.

Champ 9-204(1)



3/8". For application of solder flux to work area.


Champ 9-202(1) Champ 9-205(3)



7-1/4" in length. Soft bristles to avoid scratches. Great for cleaning aluminum, painted or plastic parts without scratching.



7-3/4" in length. Ideal for aluminum welding cleanup.



8-3/4" in length. Will not scratch stainless or polished steel.




Polypropylene bristles with 10-1/2" handle. One-piece construction. Size 10 brush. Champ 9-185(1)



Tempered bristles - 8-3/4" in length.



13-7/8" in length. Ideal for hard-to-reach areas.



7-1/8" in length. Rustproof, scratchstyle brush with plastic handle. Great for cleaning steel parts.



7-3/4" in length. A must for aluminum welding cleanup.

Champ 9-187(1)




9-1/2" in length. Wood shoe handle with durable bristles.




13-1/2" in length. Extremely heavy-duty bristles.

Champ 9-190(1) Champ 9-189(1) with scraper



10-1/4" in length. Heavy-duty steel bristles. **Champ 9-200(1)**



8-1/2"L x 3" nylon bristles. Ideal for cleaning carburetors & brake cylinders.

Oxy-Acetylene Hose Repair



Designed to make it fast and easy to perform hose fitting repairs.



1/4" hose. Includes 2 complete hose end sets. Use **08041** crimping tool to crimp to hose.



Includes 2 splice couplers for 1/4" hose. Safely repairs cuts and nicks in welding hoses. Use **08041** crimping tool to crimp to hose.

Tech Tip

Protect yourself from slag by wearing protective clothing and goggles.

Store gas cylinders away from arcs, extreme heat and flames.

Oxy-Acetylene Hoses

- · Kink-proof, flexible, double hoses with neoprene cover
- 100 PSI rating

Dimensions	MetalWork! Part # (Qty.)
3/16" diameter x 25' long	08043 (1)
1/4" diameter x 25' long	08047 (1)
1/4" diameter x 50' long	08048 (1)



Oxy-Acetylene Tips & Nozzles

- A full selection for cutting and welding sets
- Popular styles for specific applications (see Cross Reference Chart on page 80)



Airco Style Acetylene Cutting Tip (144 Series)			
Tip Size MetalWork! Part # (Qty.)			
1	08101 (1)		
2 08102 (1)			



Marquette Style Star Jet Acetylene Cutting Tip (GW4)		
Tip Size MetalWork! Part # (Qty.)		
1	08140 (1)	

Oxy-Acetylene Tips & Nozzles (continued)



Harris Style Acetylene Cutting Tip (6290 Series)		
Tip Size	MetalWork! Part # (Qty.)	
0	08112 (1)	
1	08113 (1)	
2	08114 (1)	
3	08115 (1)	



Harris Style Acetylene Heating Rosebud (J-63-2)		
Tip Size MetalWork! Part # (Qty.)		
For E-43 Mixer	08131 (1)	



Purox Style Acetylene Cutting Tip (4202)		
Tip Size MetalWork! Part # (Qty.)		
3		08150 (1)
4		08151 (1)
5		08152 (1)



Smith Style Acetylene Cutting Tip (MC12)		
Tip Size MetalWork! Part # (Qty.)		
0	08166 (1)	
1	08167 (1)	
2	08168 (1)	
3	08169 (1)	



Victor Style Acetylene Cutting Tip (1-101)		
Tip Size MetalWork! Part # (Qty.)		
00		08181 (1)
0		08182 (1)
1		08183 (1)
2		08184 (1)



Victor Style Acetylene Cutting Tip (3-101)		
Tip Size MetalWork! Part # (Qty.)		
000	08260 (1)	
00	08261 (1)	
0	08262 (1)	
1	08263 (1)	
2	08264 (1)	
3	08265 (1)	



Victor Style Acetylene Heating Rosebud Assembly (MFA)		
Tip Size MetalWork! Part # (Qty.)		
8	08202 (1)	

Oxy-Acetylene Tips & Nozzles (continued)



Victor Style Acetylene Heating Rosebud (MFA-1)	
Tip Size MetalWork! Part # (Qty.)	
1	08291 (1)



Victor Style Propane/Nat. Gas Cutting Tip (3-GPN)	
Tip Size	MetalWork! Part # (Qty.)
1	08272 (1)
2	08273 (1)

Cross Reference Chart - Cutting and Welding Tips

Name	Ind. #	Part #	Na
AIRCO A	CETYLENE	CUTTING TIP	PU
	144-1	08101	
	144-2	08102	_
HARRIS	ACETYLENI	E CUTTING TIP	
	6290-0	08112	SIV
	6290-1	08113	
	6290-2	08114	
	6290-3	08115	
HARRIS ROSEBUD HEATING TIP			_
	J-63-2	08131	VIC
MARQUETTE ACETYLENE CUTTING TIP			sei
	GW4-1	08140	


Name	Ind. #	Part #		
PUR0X	PUROX ACETYLENE CUTTING TIP			
	4202-3	08150		
	4202-4	08151		
	4202-5	08152		
SMITH A	SMITH ACETYLENE CUTTING TIP			
	MC 12-0	08166		
	MC 12-1	08167		
	MC 12-2	08168		
	MC 12-3	08169		
VICTOR	ACETYLENE	CUTTING TIP (1-101		
series)				
	00-1-101	08181		
	0-1-101	08182		
	1-1-101	08183		
	2-1-101	08184		

<u>veiu</u>	my m	μς
Name	Ind. #	Part #
VICTOR /	ACETYLENE (CUTTING TIP (3-101
series)		
	000-3-101	08260
	00-3-101	08261
	0-3-101	08262
	1-3-101	08263
	2-3-101	08264
	3-3-101	08265
VICTOR I	HEATING ROS	SEBUD STYLE
	8-MFA	08202
	8-MFA-1	08291
VICTOR I	PROPANE CU	TTING TIP
	1-3-GPN	08272
	2-3-GPN	08273


Oxy-Acetylene Tools & Accessories



Range - 0-30 PSI.



Range - 0-200 PSI.



Low cost, lightweight, dependable operation. Equipped with large file and hood.



When flint is worn, rotate new flint into position. High quality striker with a rugged frame, durable round file, three large flints and a bright plated finish.



Light, easy to use kit features circle design to provide 60 cleaning edges per inch. Kit includes file. Fits all tip sizes.




Replacement flints for 08010 lighter.

Oxy-Acetylene Tools & Accessories (continued)




Replacement flints for **08012** lighter.



Pencil-type holder with 12 drills inside with pocket clip. Cleans and trues acetylene cutting and welding tip orifices. Replacement drills available.

Oxy-Acetylene Torch Kits



Designed for light or medium duty applications. Can weld up to 1/8" and cut up to 3/8". Larger nozzles and tips can weld up to 1-1/4" and cut up to 3".



For the craftsman or mechanic. Welds up to 5/64" cuts up to 1/2" with supplied tip & nozzle. Includes welding handle, #0 tip, cutting attachment & size 0-3-101 tip, heavy duty oxygen & acetylene regulators, 3/16" x 20' twin hose, goggles & a striker.

Tech Tip

Keep tip holes clean for best cutting results.

Make sure all gas cutting equipment is kept free of oil and grease to avoid fire and injury.


Hearing Protection



Lightweight for comfort. Tough head strap for secure pressure and durability. Extra wide foam cushions for sure sealing and comfort. For most common levels of industrial noise. Self Aligning and adjustable.



Protect against loud noises with acoustic fibers and foam. Perfectly shaped plastic ear plugs are easy to insert and remove. Five pair in a reclosable pouch.



Soft, silicon material for long lasting durability. Available with safety neck cord for easy removal without loss. Available in two sizes. For protection from very loud noises.



Soft, silicon material for long lasting durability. Available with safety neck cord for easy removal without loss. Available in two sizes. For protection from very loud noises.

Tech Tip

To insure personal protection, it is recommended to wear safety goggles, gloves and ear plugs.

Safety Glasses



Stylish, top quality glasses have a universal bridge and flat folding side shields. 57mm safety lens.



Stylish, top quality glasses have a universal bridge and flat folding side shields. 57mm safety lens.



High quality safety glasses with plastic side shields. One size fits all. Not for oxy-acetylene welding.

Champ 7-759 (1)




High quality safety glasses with plastic side shields. One size fits all. Not for oxy-acetylene welding.



Clear. Inexpensive, one size fits all safety glasses that will fit over eyeglasses.

Safety Goggles, Shields & Accessories



For lab, grinding, sanding and dusty areas. Extremely absorbent filter material & lightweight. **NOTE:** Do not use for paint and other fumes.



Ideal for shop, office, home, car, boat, etc. Contains sterile gauze pads, 1" x 3" adhesive plastic strips, pre-moistened towelettes, one roll adhesive tape, Latex exam gloves, antibiotic ointment, scissors, first aid pamphlet and more.

Champ 9-982(1) shop



Rectangle shaped goggles designed to wear over regular glasses or with a magnifying lens. Six vents prevent fogging. Soft vinyl forms to head. Complete with a 4-1/4" x 2" shade 5 lens and a pit resistant cover lens.



Good general purpose goggles for industry, workshop, farming, sports, etc. Fits over regular eyeglasses. Perforated for good ventilation.



One piece molded plastic eyecups. Comfortable, face fitting contour. Complete with 50mm round shade #5 welding lens.



Flip up filter lens with stationary protective lens. Fits over eyeglasses. Standard 50mm round shade #5 lens.



Easy viewing, ventilation and comfort. #5 acetate lens. Conforms to the eye area for a light-tight seal.



Light green shaded lens with clear sides. Not for oxy-acetylene welding.



Soft flexible frame, indirect vent, fits comfortably over glasses. Complete with shade #5 lens and cover plate. Accommodates 2" x 4-1/4" lens.



Full face grinding shield available with clear or green shield. Lightweight and fully adjustable. Made of poly-type molded plastic which is non-warping. Equipped with posi-lock headgear.



Black, sporty looking cap to protect hair from hot sparks and slag. 7-3/8". Also 6-3/4" as part number **09741**.



Medium, black. Also available: size large, part number **09708**; size extra large, part number **09709**.

Welding Gloves



Brown, protects against hot metal, slag & sparks.



Gray, heat-resistant with gauntlet. 13-1/2" long. Economical choice.



High quality glove with gauntlet. 13-1/2" long.



Fleece lined & heat resistant. Most professional glove.



Protects against hot metal, slag & sparks.

Welding Helmet Lenses

- Available in various densities for many welding applications. Darker lenses for higher amperage
- Lighter lenses for indoor and light welding
- · Clear cover lenses are high quality material to protect shaded lenses
- Gold lenses reflect radiated energy from arc and provides maximum protection from ultraviolet and infrared radiation



2" x 4-1/4"				
Use with helmets: 09500 and 09512.				
a	D 1 " (OL)			
Shade	Part # (Qty.)			
Clear Glass Cover Plate	09538 (1)			
Clear Plastic Safety Plate	09537 (1)			
Green #5	09530 (1)			
Green #8	09531 (1)			
Green #9	09532 (1)			
Green #10	09533 (1)			
Green #11	09534 (1)			
Green #12	09535 (1)			

4-1/2" x 5-1/4"			
Use with helmet 09514 .			
Shade	Part # (Qty.)		
Clear Glass Cover Plate	09552 (1)		
Clear Plastic Safety Plate	09551 (1)		
Green #8	09546 (1)		
Green #9	09547 (1)		
Green #10	09548 (1)		

Magnaweld Lens (2" x 4-1/4")				
Magnifies to allow you to weld with or without your eyeglasses. Fits helmets and goggles with 2" x 4-1/4" lens opening.				
Shada Part # (Oty)				
, , , ,				
F2.00 09559 (1)				
Shade F1.50	Part # (Qty.)			

Welding Helmets & Accessories




Ratchet style. Easy adjusting straps for head size and crown fit. Pliable, long lasting plastic that will not stiffen. Stays cool and comfortable. Ratchet type adjustment for head band and pin type adjustment for crown strap. Fits helmets: **09512** and **09514**.

09524 (1) MetalWork!™ Headgear

Ratchet style. Adjusting straps for head size & crown fit. Pliable, long lasting plastic that will not stiffen. Stays cool & comfortable. Pivot points extend from head band to eliminate pressure on sides of head. Fits helmets: **09500.**



Lightweight with extended bib to deflect spatter. Fixed front with a 4-1/2" x 2" shade 11 lens and clear plastic cover.



Tough, lightweight helmet with the convenience of a 4-1/4" x 2" shade 10 flip-up lens and clear cover. Black with ratchet type headgear.



Tough, lightweight helmet with the convenience of a 4-1/2" x 5-1/4" shade 10 flip-up lens and clear cover. Black with ratchet type headgear.

Tech Tip

Personal Protection:

- Wear dry leather gloves, a protective jacket, and helment with the proper shaded lens for maximum protection against shocks, burns, and arc rays.
- Use a lens and filter which conforms to ANSI Z87.1 standards to protect your eyes from arc rays and sparks. Avoid breathing fumes and gases when welding.
- Do not weld vapors from spraying and cleaning operations to avoid fires and explosions. Use adequate ventilation in all work areas to prevent injury.
- Remove all fire hazards from a welding area or cover them with a fire retardant material.
- Use suitable work clothes made of flame-resistant materials for protection.
- Protect other personnel in work area by using a non-flammable screening and warn them not to watch the arc or hot spatter.

Solder

- Soldering is a fast, simple and inexpensive way to permanently join electrical wires and metal parts
- In tin/lead solder alloys, the alloy content is expressed in percent of tin and lead or tin and antimony with tin content always listed first
- For example, 40/60% solder is 40% tin and 60% lead



Acid Core

For non-electrical applications. Ideal for many types of metals: galvanized steel, brass, nickel & copper. Works well on fitting connections & sheet metal joints. Acid flux acts as a cleaning agent & is water soluble. Can be cleaned off with water.


Grade	Size	Weight	Package Type	Tensile Strength	Melting Temp.	MetalWork! Part # (Qty.)	Champ Part # (Qty.)
95/5% Tin/Antimony LEAD FREE	1/16"	1 oz.	tube	6000	485°F	07338 (1)	
95/5% Tin/Antimony LEAD FREE	3/32"	1/4 lb.	spool	6000	485°F	07320 (1)	
95/5% Tin/Antimony LEAD FREE	1/8"	1/2 lb.	spool	6000	485°F	07321 (1)	
95/5% Tin/Antimony LEAD FREE	1/8"	1 lb.	spool	6000	485°F	07322 (1)	
5/95% Tin/Lead	1/8"	1 lb.	spool	4190	590°F	07302 (1)	
30/70% Tin/Lead	1/8"	1/2 lb.	spool	4500	496°F	07301 (1)	
40/60% Tin/Lead	1/16"	1 oz.	tube	4900	460°F	07303 (1)	9-1323 (1)
40/60% Tin/Lead	3/32"	1/4 lb.	spool	4900	460°F	07300 (1)	
40/60% Tin/Lead	1/8"	1 lb.	spool	4900	460°F	07323 (1)	9-1319 (1)
40/60% Tin/Lead	1/8"	1/2 lb.	spool	4900	460°F		9-1321 (1)

Rosin Core

Used for electrical work. Flux acts as a cleaning agent. Non-conductive and non-corrosive. Works well on all types of electrical connections.

Grade	Size	Weight	Package Type	Tensile Strength	Melting Temp.	MetalWork! Part # (Qty.)	Champ Part # (Qty.)
95/5% Tin/Antimony LEAD FREE	1/16"	1 oz.	tube	6000	485°F	07336 (1)	
95/5% Tin/Antimony LEAD FREE	3/32"	1/4 lb.	spool	6000	485°F	07333 (1)	
95/5% Tin/Antimony LEAD FREE	1/8"	1 lb.	spool	6000	485°F	07328 (1)	
95/5% Tin/Antimony LEAD FREE	1/8"	1/2 lb.	spool	6000	485°F	07334 (1)	
5/95% Tin/Lead	1/8"	1 lb.	spool	4190	590°F	07309 (1)	
30/70% Tin/Lead	3/32"	1/2 lb.	spool	4500	496°F	07308 (1)	
40/60% Tin/Lead	1/16"	1 oz.	tube	4900	460°F	07311 (1)	9-1324 (1)
40/60% Tin/Lead	3/32"	1/4 lb.	spool	4900	460°F	07307 (1)	
40/60% Tin/Lead	1/8"	1/2 lb.	spool	4900	460°F		9-1322 (1)
40/60% Tin/Lead	1/8"	1 lb.	spool	4900	460°F	07329 (1)	9-1325 (1)
60/40% Tin/Lead	1/16"	1/4 lb.	spool	5600	423°F	07306 (1)	

Solder Kits & Accessories



96/4% Tin-Silver LEAD FREE. Wire Diameter: 1/16", Weight: 1 oz. Designed for use with chrome plate, brass, nickel, copper, and stainless steel. Perfect for the home hobbyist. Must use with flux.



96/4% Tin-Silver LEAD FREE. Wire Diameter: 1/16", Weight: 1 oz. Designed for use with chrome plate, brass, nickel, copper, and stainless steel. Perfect for the home hobbyist. Flux and flux brush included in kit.



Soft soldering and tinning flux. For virtually all metals other than aluminum, magnesium or titanium. 200 - 600 F. 2 oz.



For joining copper to copper or copper to brass connections.

Champ 9-1309



110/30 Watt. 5 ft. Cord. 5/32 (4mm) tip. U.L. Listed.

Champ 9-1332

Tech Tip

Read recommended application for solder to ensure the correct type is used.

Brazing Rods & Flux

- Flux and brazing rod products for repairing copper, steel, brass, cast and galvanized iron
- · High quality, low fuming products for excellent results and smooth appearance
- · For best results, use flux products to clean surface before brazing



Bare Brazing Rod

High quality, low fuming rods that tin easily and offer great wear resistance and high strength. Fuses with copper, brass, steel, galvanized and cast iron. Brazing flux required.

Size	Package Type	MetalWork! Part # (Qty.)
3/32" x 36"	Job Pack	07251 (1)
1/8" x 36"	Job Pack	07252 (1)

Brass Brazing Flux

To clean work piece before brazing. Use for best possible results.

poodinio rocantor				
Size	Package Type	MetalWork! Part # (Qty.)		
1/2 lb.	1/2 Lb.	07260 (1)		

Flux Coated Brazing Rod

Strong, wear resistant, low fume rod of high quality. Easy to tin, excellent for all brazing jobs. Quality coating cuts brazing time on autos, tanks, and pipes. Fuses with steel, copper, brass, galvanized and cast iron.

Size	Package Type	MetalWork! Part # (Qty.)
3/32" x 36"	Job Pack	07256 (1)
1/8" x 36"	Job Pack	07257 (1)

Oxy-Acetylene Rods

Copper coated, mild steel rods for high quality welds that are strong and ductile. Copper coating prevents corrosion and rust. An excellent general purpose rod for commercial, shop, home projects, and maintenance.

Size	Package Type	MetalWork! Part # (Qty.)
1/16" x 36"	Job Pack	07253 (1)
3/32" x 36"	Job Pack	07254 (1)
1/8" x 36"	Job Pack	07255 (1)

Super Sil-Flo - Self Fluxing

Self-fluxing on copper. Substitute for 6% to 15% silver content brazing alloys for copper installations. Works well for joints and sleeves, couplings, fittings, copper tubing, electrical connections & water lines. Not recommended for iron and steel.

Size	Package Type	MetalWork! Part # (Qty.)
18"	Job Pack	07242 (1)

MIG Accessories



Spot Weld Nozzle			
Style	Gun Model	Size	MetalWork! Part # (Qty.)
Tweco - Mini MIG/ Tweco - # 1 Gun	21-62FAS	.023"/.030"/ .035"	07710 (1)*

MIG Accessories - Contact Tips

 Copper tips which the wire passes through. These are sized for the wire used and transfer the arc current to the wire.



Style	Gun Model	Size	MetalWork! Part # (Qty.)
Miller - M15 Gun	087-299	.023"	07740 (10)
Miller - M15 Gun	000-067	.030"	07741 (10)
Miller - M15 Gun	000-068	.035"	07742 (10)
Tweco - Mini Tweco - #1 Gun/Lincoln - Magnum 100	11-23/S19726-1	.023"	07701 (10)
Tweco - Mini Tweco - #1 Gun/Lincoln - Magnum 100	11-30/S19726-2	.030"	07702 (10)

MIG Accessories - Gas Diffusers

 Holds contact tip and nozzle in the correct position and diffuses the shielding gas equally around the shield



Style	Gun Model	Size	MetalWork! Part # (Qty.)
Miller - M15 Gun	169-716	.023"/.030"/.035"	07707 (1)
Tweco - #1 Gun	51-23	.023"	07700 (1)
Tweco - #1 Gun	51	.030"/.035"	07706 (1)
Tweco - Mini MIG/Lincoln - Magnum 100 Gun	35-50/S19728	.023"/.030"/.035"	07715 (1)

MIG Accessories - Nozzles

- · Covers the diffuser and the contact tip
- Directs the gas pattern over the arc to shield the welding puddle from oxygen and nitrogen in the atmosphere



Style	Gun Model	Size	MetalWork! Part # (Qty.)
Miller - M15 Gun	169-715	.023"/.030"/.035"	07709 (1)
Tweco - Mini MIG/Tweco - # 1 Gun	21-T37	.023"	07708 (1)
Tweco - Mini MIG/Tweco - # 1 Gun	21-62	.035"	07717 (1)
Tweco - Mini MIG/Tweco - #1 Gun/Lincoln - Magnum 1	21-50/M16294	.023"/.030"/.035"	07716 (1)

— See next page for MIG Welding Part Interchange —

MIG Welding Part Interchange

	Contact Tip	Noz	zies	Spot Noz		Conta Tip		Ga Diffu	
MIG Gun Type	Size	Part #	Industry #	Part #	Industry #	Part #	Industry #	Part #	Industry #
Tweco - Mini MIG	.023	07708	21-T37	07710	21-62FAS	07701	11-23	07715	35-50
	.030	07716	21-50	07710	21-62FAS	07702	11-30	07715	35-50
	.035	07717	21-62	07710	21-62FAS	07703	11-35	07715	35-50
Tweco - #1 Gun	.023	07708	21-T37	07710	21-62FAS	07701	11-23	07700	51-23
	.030	07716	21-50	07710	21-62FAS	07702	11-30	07706	51
	.035	07717	21-62	07710	21-62FAS	07703	11-35	07706	51
Miller - M15 Gun	.023	07709	169-715			07740	087-299	07707	169-716
	.030	07709	169-715			07741	000-067	07707	169-716
	.035	07709	169-715			07742	000-068	07707	169-716
Lincoln -									
Magnum 100 Gun	.023	07716	M16294			07701	S19726-1	07715	S19728
	.030	07716	M16294			07702	S19726-2	07715	S19728
	.035	07716	M16294			07703	S19726-3	07715	S19728

MIG Wire

Aluminum Mig Wire (ER4043)

Popular filler metal chemistry with silicon to lower melting point & provide fluidity. Moderately soft - good weld appearance. Preferred as a filler metal for its operating characteristics. Ideal for constant high temperature apps. Non-heat treatable.

Wire Size	Weight	Spool Size	MetalWork! Part # (Qty.)
.030"	1 lb.	4"	07280 (1)*

Gasless Flux Cored Wire (E71T-GS)

General purpose wire is ideal for auto body repair & light fabrication on most thin metals. High carbon content produces great welds on carbon & galvanized steels. No CO2 or Argon CO2 gas shielding required. Can be used with AC or DC reverse polarity.

Wire Size	Weight	Spool Size	MetalWork! Part # (Qty.)
.030"	2 lb.	4"	07276 (1)
.035"	2 lb.	4"	07277 (1)
.035"	10 lb.	8"	07278 (1)

Tech Tip

Follow all local and national codes for electrical wiring.

Welding Accessories



4-Way Repair Pick Kit	
Description	MetalWork! Part # (Qty.)
Aluminum Handle w/4 hardened steel picks	07525 (1)



C-Clamp, High Tensile Frame		
Description	MetalWork! Part # (Qty.)	
2" Capacity	07560 (1)	
3" Capacity	07561 (1)	
4" Capacity	07562 (1)	
5" Capacity	07563 (1)	
6" Capacity	07564 (1)	



Cable Connectors, Male & Female Pair	
Description	MetalWork! Part # (Qty.)
Fits cable sizes 6 thru 2 - red	07604 (1)
Fits cable sizes 6 thru 2 - black	07605 (1)



Chipping Hammer - Straight Head	
Description	MetalWork! Part # (Qty.)
Style H for cleaning slag from metal	07516 (1)



Electrode Holder, Insulated		
	MetalWork!	
Description	Part # (Qty.)	
200 amp	07500 (1)	
300 amp	07501 (1)	



Ground Clamp			
	MetalWork!		
Description	Part # (Qty.)		
Brass: 200-300 amp	07512 (1)		
Steel: 300 amp	07510 (1)		
Steel: 500 amp	07511 (1)		



Locking C-Clamp			
	MetalWork!		
Description	Part # (Qty.)		
10-1/2" long	07570 (1)		



Locking Welding Clamp			
Description	MetalWork! Part # (Qty.)		
Adjusts and locks to different thicknesses	07571 (1)		

Welding Accessories (continued)



Male Plug		
Description	MetalWork! Part # (Qty.)	
50A-125/250V; (crowfoot)	07603 (1)	
50A-250V; (pin type)	07601 (1)	





Multi-Purpose Magnet		
Description	MetalWork! Part # (Qty.)	
Large, strong enough to stick to most iron objects	07612 (1)	



Premium Scribe, Tungsten Carbide Tip		
	MetalWork!	
Description	Part # (Qty.)	
Carbide tip with pocket clip	07527 (1)	



Soapstone Holder & Refills				
Description	MetalWork! Part # (Qty.)			
Round style aluminum w/pocket clip	07542 (1)			
Refills - round: 1/4" x 5" 3 pack	07544 (3)			
Flat style aluminum w/pocket clip	07550 (1)			
Refills - flat: 3/16" x 1/2" x 5" 3 pack	07552 (3)			



Wall Receptacle		
Description	MetalWork! Part # (Qty.)	
50A-125/250V; (crowfoot)	07602 (1)	
50A-250V; (pin type)	07600 (1)	



Welding Cable, 600 Volt Rating	
Description	MetalWork! Part # (Qty.)
No. 4 gauge x 100'	07628 (1)

Welding Cable Lugs

All copper, designed for a solid connection and good performance. Easy to swage and/or crimp.



Wire Gauge		MetalWork!
Size	Size	Part # (Qty.)
8	#10	07575
6	1/4"	07576
4	5/16"	07577
4	3/8"	07578
2	5/16"	07579
1-2	1/2"	07587
1	3/8"	07580

Wire Gauge Size	Size	MetalWork! Part # (Qty.)
1/0	3/8"	07581
1/0	1/2"	07582
1/0-2/0	1/2"	07589
2/0	3/8"	07583
2/0	1/2"	07584
3/0	1/2"	07585
4/0	1/2"	07586

Welding Rods & Electrodes

- Wire diameters include: 3/32", 1/8", and 5/32"
- Available in 1 lb., 5 lb., 10 lb. & 50 lb. shrink-wrapped boxes

6011

Mild Steel. All-purpose, all-position for general repair. Great results on rusty, dirty metal, sheet metal and poor fit-ups. Designed for the repair and maintenance welder. Provides a stable arc and good penetration. AC or DC+.

	0 1				
Size	Amperage	MetalWork! Part # (Qty.) 1 lb.	MetalWork! Part # (Qty.) 5 lb.	MetalWork! Part # (Qty.) 10 lb.	MetalWork! Part # (Qty.) 50 lb.
3/32"	20-75	07120 (1)	07121 (1)	07122 (1)	07123 (1)
1/8"	75-100	07125 (1)	07126 (1)	07127 (1)	07128 (1)
5/32"	100-175	07130 (1)	07131 (1)	07132 (1)	07133 (1)



6013

Mild Steel. All-position electrode with a stable arc for welding on clean, new metal. Low spatter loss & metal solidifies quickly for a close-ripple deposit. Easy starting at low amperage. Ideal for machine parts & buildup of shafts. AC or DC+.

Size	Amperage	MetalWork! Part # (Qty.) 1 lb.	MetalWork! Part # (Qty.) 5 lb.	MetalWork! Part # (Qty.) 10 lb.	MetalWork! Part # (Qty.) 50 lb.
3/32" 1/8" 5/32"	20-75 75-130 100-175	07140 (1) 07145 (1) 07150 (1)	` '	07147 (1)	07143 (1) 07148 (1) 07153 (1)

Tech Tip

Do not dip electrode into water for cooling.

Welding Rods & Electrodes (continued)

7014

Mild Steel. Iron powder coated for higher speed & good deposit efficiency. Provides a smooth bead with a stable arc. Good appearance w/ easy slag removal. All position on straight/reversed polarity. Applications are the same as 6012 or 6013. AC or DC-.

Size	Amperage	MetalWork! Part # (Qty.) 1 lb.	MetalWork! Part # (Qty.) 5 lb.	MetalWork! Part # (Qty.) 10 lb.	MetalWork! Part # (Qty.) 50 lb.
3/32"	20-75	07160 (1)	07161 (1)	07162 (1)	
1/8"	75-130	07165 (1)	07166 (1)	07167 (1)	_
5/32"	100-175	07170 (1)	07171 (1)	07172 (1)	_

Tech Tip

Do not use rods with damaged coating.

7018

Low Hydrogen, iron powder coating. For cold rolled steel, medium & high carbon steel, hardenable low alloy steel & high sulphur steel. Joins hard-to-weld steels easily. For vertical, flat & fillet welding. DC+ or AC.

Size	Amperage	MetalWork! Part # (Qty.) 1 lb.	MetalWork! Part # (Qty.) 5 lb.	MetalWork! Part # (Qty.) 10 lb.	MetalWork! Part # (Qty.) 50 lb.
3/32" 1/8" 5/32"	20-75 75-130 100-175	07185 (1)	07186 (1)	07187 (1)	07183 (1) 07188 (1) 07193 (1)

7018 AC

Mild Steel. All-purpose, all-position for general repair. Great results on rusty, dirty metal, sheet metal and poor fit-ups. Designed for the repair and maintenance welder. Provides a stable arc and good penetration. AC or DC+.

Size	Amperage	MetalWork! Part # (Qty.) 1 lb.	MetalWork! Part # (Qty.) 5 lb.	MetalWork! Part # (Qty.) 10 lb.	MetalWork! Part # (Qty.) 50 lb.
3/32"	20-75	07200 (1)	07201 (1)	07202(1)	_
1/8"	75-130	07204 (1)	07205 (1)	07206 (1)	_
5/32"	100-175	07209 (1)	07210 (1)	07211 (1)	_

ER 308L Stainless Steel

Stainless Steel. All position. Used for welding types 304L, 321 and 347 stainless steels. Carbon content held to 0.03% max. to reduce intergranular carbide precipitation.

			MetalWork! Part # (Qty.)	MetalWork! Part # (Qty.)	MetalWork! Part # (Qty.)	MetalWork! Part # (Qty.)
	Size	Amperage	1 lb.	5 lb.	10 lb.	50 lb.
1/	8"	60-100	07246 (1)*	07247 (1)*	_	_

ER 316L Stainless Steel

Stainless Steel. All position. For welding acid-resistant steels such as 316 and 316L. Welds produced have good resistance to corrosion in most inorganic and organic acids and to pitting in chloride-bearing solutions.

Size	Amperage	MetalWork! Part # (Qty.) 1 lb.	MetalWork! Part # (Qty.) 5 lb.	MetalWork! Part # (Qty.) 10 lb.	MetalWork! Part # (Qty.) 50 lb.
1/8"	60-100	07273 (1)*		_	_

Welding Rods & Electrodes (continued)

Hard Facing

All position, hard surfacing rod. Smooth arc action permits easy application. Slag is easily removed. Used for building up or surfacing areas to resist abrasion. Applications include cylinder bars, draw bars, augers, etc. AC or DC reverse polarity.

Size	Amperage	MetalWork! Part # (Qty.) 1 lb.	MetalWork! Part # (Qty.) 5 lb.	MetalWork! Part # (Qty.) 10 lb.	MetalWork! Part # (Qty.) 50 lb.
		1 121	0.51	10 151	00 151
5/32"	100-175	07220 (1)	07221 (1)	_	_

Tech Tip

Keep all electrodes in airtight containers to prevent dampness from damaging the rod coating.

High Nickel 55%

Nickel rod designed for making machinable welds in cast iron. Welds well on dirty or corroded surfaces with a smooth arc at low amperages.

Size	Amperage	MetalWork! Part # (Qty.) 1 lb.	MetalWork! Part # (Qty.) 5 lb.	MetalWork! Part # (Qty.) 10 lb.	MetalWork! Part # (Qty.) 50 lb.
1/8"	100-175	07233 (1)	07234 (1)	_	_

High Nickel 99%

Nickel cast rod. All position AC or DC+. Powered iron coating for good, machinable welds on cast iron. Creates quality welds on corroded surfaces. No pre-heating or post-heating.

		MetalWork! Part # (Qty.)	MetalWork! Part # (Qty.)	MetalWork! Part # (Qty.)	MetalWork! Part # (Qty.)
Size	Amperage	1 lb.	5 lb.	10 lb.	50 lb.
1/8"	100-175	07230 (1)	07231 (1)	_	_

Nomacast

Cast Iron. A non-machinable steel rod designed and coated to run at low amperage for repairing cast iron. For use on cast parts that are not subjected to heating and cooling in normal use. AC or DC. DC+ recommended.

Size	Amperage	MetalWork! Part # (Qty.) 1 lb.	MetalWork! Part # (Qty.) 5 lb.	MetalWork! Part # (Qty.) 10 lb.	MetalWork! Part # (Qty.) 50 lb.
1/8"	100-175	07226 (1)	07227 (1)	_	_

Weld-All

Designed for extremely strong weld deposits. High chromium and nickel alloy. Corrosion resistant in high and low teperatures. High crack resistance under tough service conditions.

Size	Amperage	MetalWork! Part # (Qty.) 1 lb.	MetalWork! Part # (Qty.) 5 lb.	MetalWork! Part # (Qty.) 10 lb.	MetalWork! Part # (Qty.) 50 lb.
1/8"	60-100	07236 (1)	07237 (1)		_

